

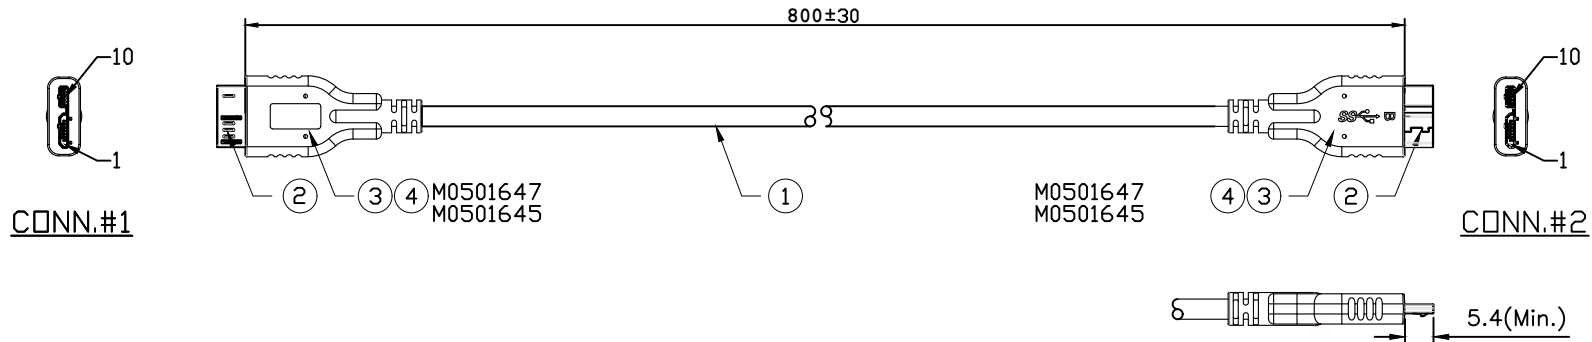


REVISION		
REV.	DESCRIPTION	DATE
1.0	NEW ISSUE	

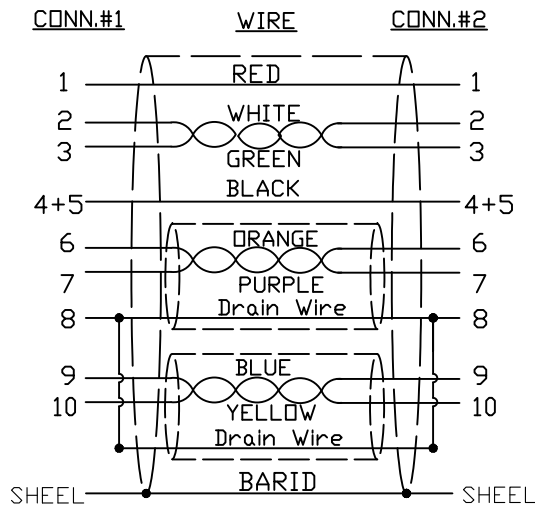

ELECTRICAL CHARACTER:  
 1. 100% OPEN&SHORT TESTING  
 2. WITHSTANDING VOLTAGE:DC 300V 0.1Sec  
 3. INSULATION RESISTANCE:20M Ohms(Min)  
 4. CONDUCTIVE RESISTANCE:2.0 Ohms(Max)

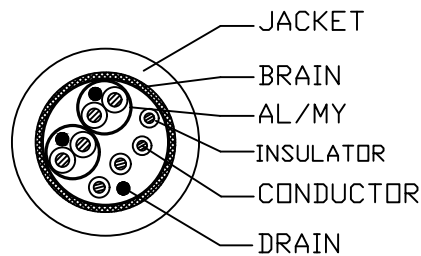

4	OVERMOLD		YL0103002	PVC 45P BLACK<REACH>
3	INNERMOLD		YL0103013	PE LOW DENSITY
2	USB CONN.	2	YL0102210	USB MicroB
1	USB CABLE	800mm	YL0101502	(7/0.08T*1P+D+AL+MYLAR)*2P +7/0.08T*1P+7/0.20T*2C+F+AL+SP OD:4.2mm
NO.	DESCRIPTION	QTY.	PART NO.	MATERIAL
				DESCRIPTION: CABLE ASSEMBLY, USB3.0 MicroB (M) TO USB3.0 MicroB (M)
DATE	11/25-13	PART NO	4041-4255	REV 1.0
DWN		FILE NO		UNIT MM
CHK			SCALE:N/A	SHEET 1/1
APP		TOLERANCES	DX: ±0.50	DX: ±0.25
				∠: ±2°