

# UP-CHCR1

## Temperature/Humidity Test Report

Report NO: 19D0200011

Summary	<p><input checked="" type="checkbox"/> <b>Pass</b></p> <p><input type="checkbox"/> <b>Fail</b> Note : There is/are ____ defect(s) not list in the report, please check it in the DTS Website.</p> <p><input type="checkbox"/> <b>Pass with Deviation</b> Comment: _____</p>
---------	---

<b>Issue date</b>	<b>QE Manager</b>	<b>Test Engineer</b>
2019-03-28	Louie Lee	Ben Sun

## Test item list

1. <i>Test item list</i> -----	2
2. <i>Configuration of EUT</i> -----	3
3. <i>Temp./humidity power on/off test</i> -----	4
4. <i>Temperature variation operation test</i> -----	5
5. <i>Cold start and hot start test</i> -----	6

### Testing Result


Num	Test item list	Result	Remark
1	Temp./humidity power on/off test	Pass	
2	Temperature variation operation test	Pass	
3	Cold start and hot start test	Pass	

# Configuration of EUT

## Test Product: UP-CHCR1 A1.1

### Sample Configuration & Quantity Under Test:

1. CPU: Intel® ATOM(TM) X5-Z8350 Processor 1.44 GHz
2. BIOS Ver.: R1.7(UCR1BM17)
3. Chipset: Intel® Cherry Trail
4. Memory: DDR3L 4GB(Samsung-K4B8G1646D-MYK0)
5. Storage: EMMC Sandisk 64GB(SDINBDA4-64G-V)
6. Test Software: Windows 10 / Run PassMark Burn In Test 8.1 Pro (1025)
7. Adapter: FJ-SW0504000N / 5V / 4A
8. CPU Cooler:

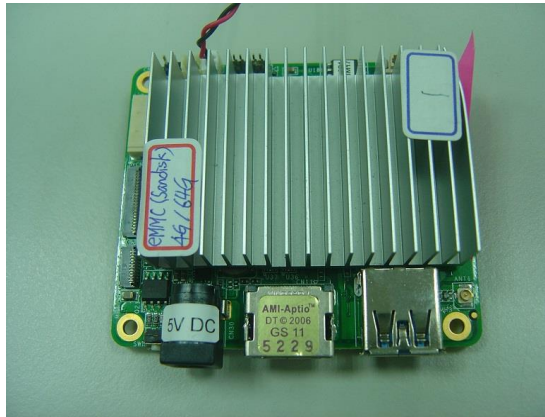

# Temp./humidity power on/off test

**Test Date:** 03-22~ 25-2019

**Test Site:** AAEON QE Dept.

**Test Standard:** Refer to IEC 68-2-30 Testing procedures

Test Db: Damp Heat Test

Refer to IEC 68-2-1 Testing procedures

Test Ad: Cold Test

**Test Equipment:**

Programmable Temperature & Humidity Chamber: (K.SON. INS. TECH. CORP.)

Model: THS-D7TS-100+LN2

Date of Calibration: 09/07/18

Due date of Calibration: 09/06/19

Serial Number: A0004


**Temperature & Humidity Power On/Off Test:**

1. Test High Temp./Humidity: 60°C @90%RH
2. Test Low Temperature: 0°C
3. Test Time: 24Hours / Cycle
4. Test Cycle: 3 Cycles
5. Test Software: Windows 10 / Run Rebooter program

**Testing Specification:**

Step	Temperature (°C)	Humidity (%RH)	Duration (HH:MM)
1	25	50	00:30
2	25	50	00:30
3	25	90	01:00
4	25	90	00:30
5	60	90	03:30
6	60	90	03:00
7	0	0	04:50
8	0	0	05:23
9	25	50	01:47
10	25	50	03:00

**Test Curve:**

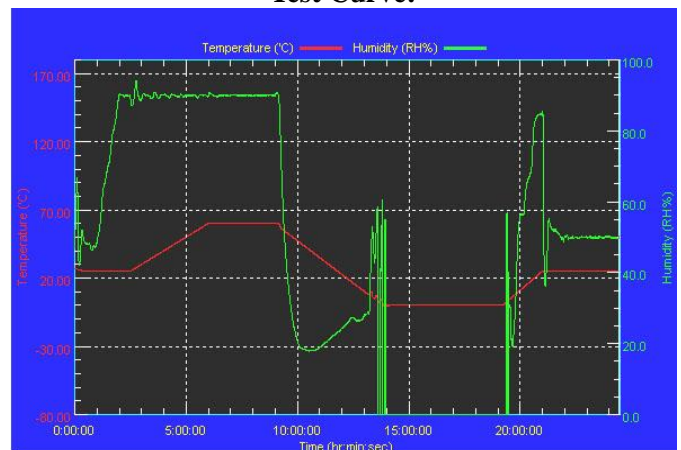

**Test Result:**

	Actual	Successful	Failure rate	Test Result
Power On/Off	1030/times	1030/times	0 %	Pass
<b>Note:</b> 1. Failure rate need to under 0%. 2. Power on/off fixture setting: on - 210 sec / off - 10 sec				

# Temperature variation operation test

**Test Date:** 03-21 ~ 22-2019

**Test Site:** AAEON QE Dept.


**Test Standard:** Refer to IEC 68-2-14 Testing procedures  
Test N: Change of temperature Test

**Test Equipment:**

Programmable Temperature & Humidity Chamber: (K.SON. INS. TECH. CORP.)  
Model: THS-D7TS-100+LN2  
Date of Calibration: 09/07/18  
Due date of Calibration: 09/06/19  
Serial Number: A0004

**Temperature & Humidity Cycle Test:**

1. Test Low Temperature: 0°C (1~3 cycles)
2. Test High Temperature: 60°C (1~3 cycles)
3. Test dwell time: 4Hrs (1~2 cycles)  
2Hrs (3<sup>rd</sup> cycle)
4. Temperature slope: 2°C/min
5. Test cycle: 3 cycles
6. Test Environment Curve:

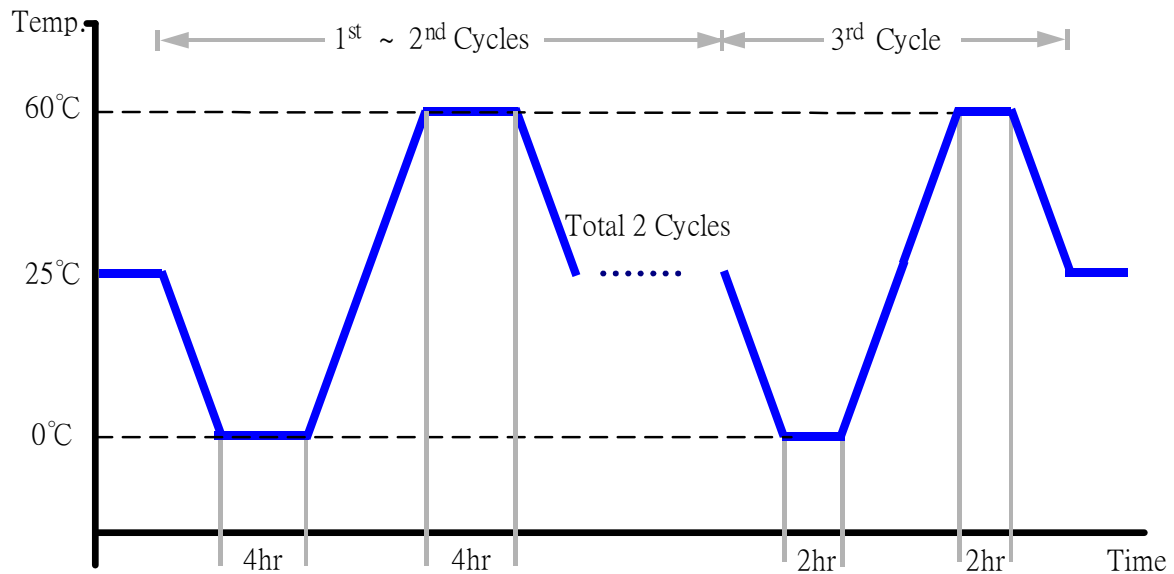

**Test Result:**

No issues were found during the temperature variation operation test.

# Cold start and hot start test


**Test Date:** 03-26 ~ 27-2019

**Test Site:** AAEON QE Dept.

**Test Standard:** Refer to IEC 68-2-14 Testing procedures  
Test N: Change of temperature Test

**Test Equipment:**  
Programmable Temperature & Humidity Chamber: (K.SON. INS. TECH. CORP.)  
Model: THS-D7TS-100+LN2  
Date of Calibration: 09/07/18  
Due date of Calibration: 09/06/19  
Serial Number: A0004

**Test Condition:**

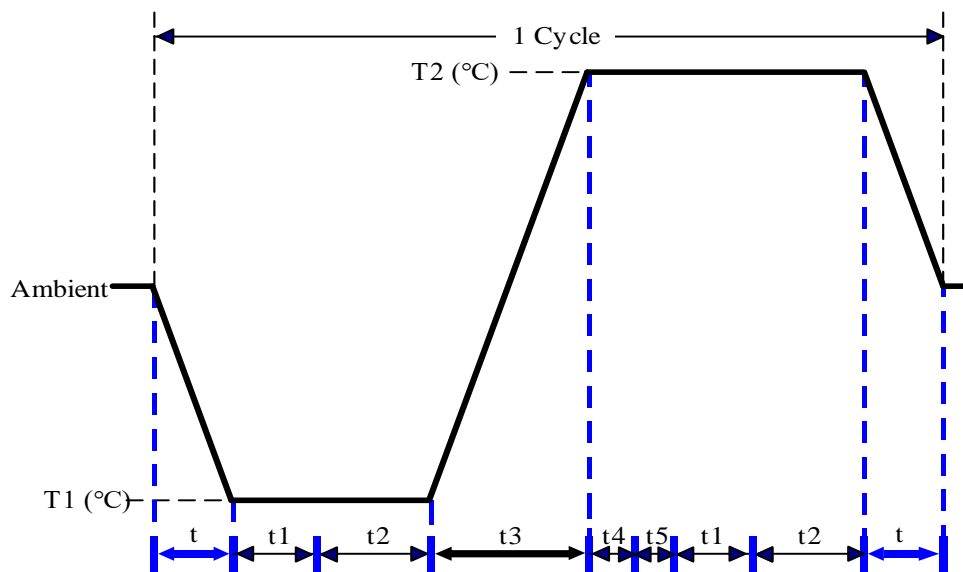

Parameters	Description
T1	0°C
T2	60°C
t1	1 hrs
t2	2 hrs
t4, t5	30 min
t, t3	2°C/min
n (Cycle)	1

t, t3 = temprature slope

t, t1: Power Off

t2: Power on/off test 10 times (on 2 min / off 5min)

t3, t4: Run PassMark Burn In Test

t5: Windows 10 Software restart test 2 times

Test Software: Windows 10

**Test Result:**

- No issues were found during the cold start test.
- No issues were found during the hot start test.