


REVISION		
REV.	DESCRIPTION	DATE
1.0	NEW ISSUE	


1 2 3 4 5 6 7 8

A
B
C
D
E
F

A
B
C
D
E
F

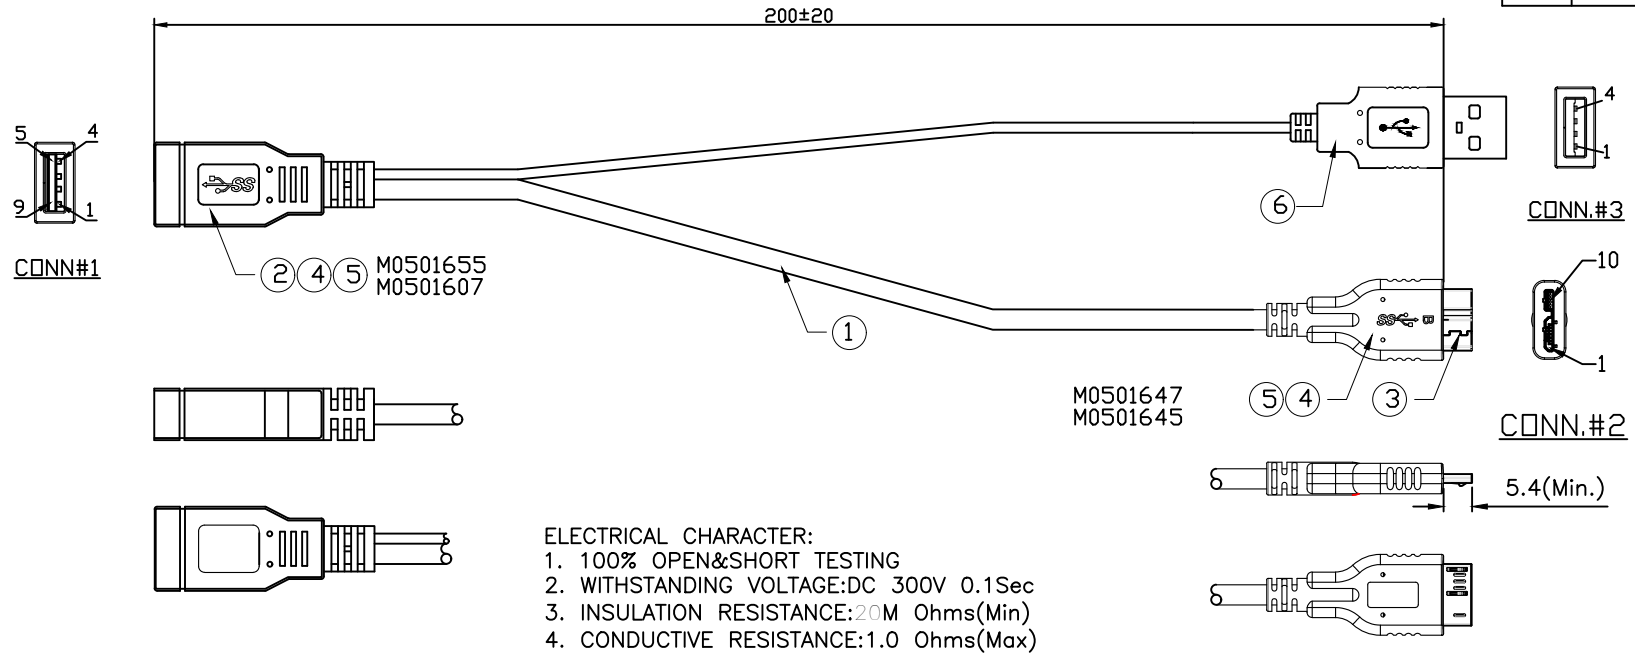

ELECTRICAL CHARACTER:
 1. 100% OPEN&SHORT TESTING
 2. WITHSTANDING VOLTAGE:DC 300V 0.1Sec
 3. INSULATION RESISTANCE:20M Ohms(Min)
 4. CONDUCTIVE RESISTANCE:1.0 Ohms(Max)

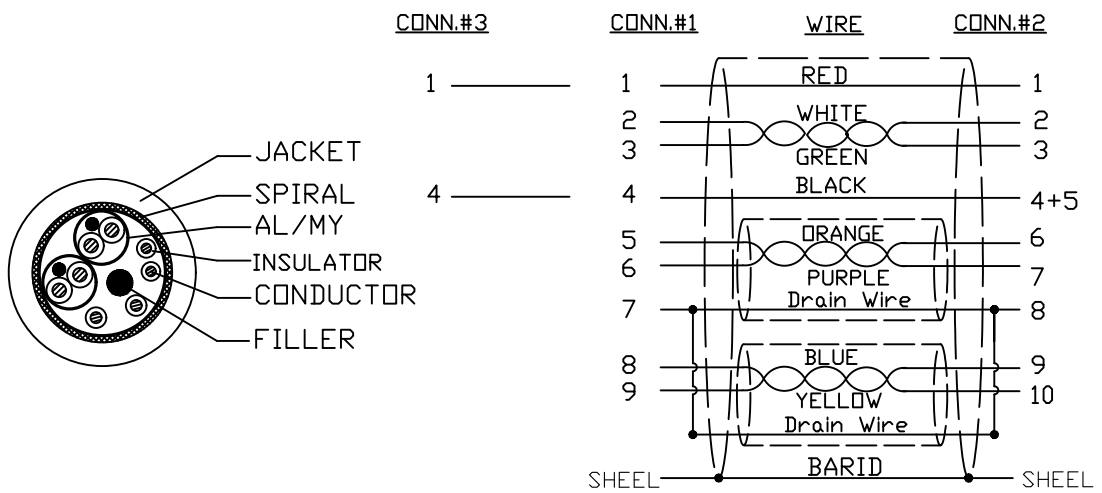

6	CONN#3.	1	4041-0134	
5	OVERMOLD		YL0103003	PVC 45P WHITE
4	INNERMOLD		YL0103013	PE LOW DENSITY
3	CONN #2	1	YL0102210	USB MicroB
2	CONN #1	1	YL0102214	USB A(F)
1	USB3.0 CABLE	200mm	YL0101506	(7/0.08T*1P+D(7/0.08T)+A+M)*2+7/0.08T*1P+7/0.127T*2C+F+A+SP(96/0.08TA)ØD:4.0mm PVC WHITE
NO.	DESCRIPTION	QTY.	PART NO.	MATERIAL
DESCRIPTION: CABLE ASSEMBLY. USB 3.0 AF(全包)+USB 2.0 AM TO MicroB				
DATE		PART NO	4041-4258	REV 1.0
DWN		FILE NO		UNIT MM
CHK		⊕	SCALE:N/A	SHEET 1/1
APP		TOLERANCES	□X:±0.50 □XX:±0.25	∠:±2°

1 2 3 4 5 6 7 8