


Wire CONNECTION

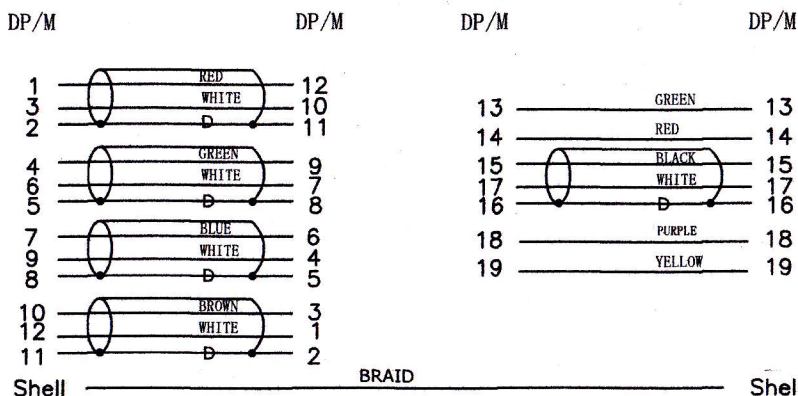

Note:

1. ALL calbe be testing of 100% open/short.
2. Electric speciality:
  1. HI-POT:DC 300V
  2. Contact Resistance:5Ω/Max.
3. Insulation Resistance:10MΩ/MIN

Dimension control table

L	L1
1M	1M
2M	2M
3M	3M
5M	5M

⑥	dust cap	PE	2	PCS
⑤	SR	45P ,PVC BLACK		G
④	Plastic shell	20P DP/M ABS Plastic shell BK(Ultrasonic)	1	SET
③	PE	PE		G
②	Plug	DP/M 20P SOLDER TYPE ,PIN:PLATED AU 1U,SHELL GOLD PIATED	2	PCS
①	WIRE	UL20276 [30AWG (7/0. 1TC*1P+D(7/0. 10TC)+AL]*5+30AWG(7/0. 1TC)*4C+A+D(7/0. 10BC)+B(50%AL) OD:6. 5MM BLACK	L1	M
No	Name	Discription	quantity	unit

NINGBO LONGTIME CABLE CO., LTD									
Name specifications	DP/M--DP/M 20PIN BLACK								
Date	2015.11.18	unit	MM	Proportion	Arbitrarily				
Customer P/N				P/N	XHSYDP020B0000				
APPR	CHECK		DRAW		WARREN	Edition A0 PAGE 1			