

## RFA-25-C2M2-U-M70

### Specifications


Frequency range	2400 MHz – 2500 MHz	5150 MHz -5875 MHz
Gain	2 dBi	2 dBi
VSWR	2.0 : 1 Max.	2.0 : 1 Max.
Polarization	Linear, vertical	Linear, vertical
Power handling	2 W (cw)	2 W (cw)
Impedance	50 $\Omega$	50 $\Omega$
Connector	RP SMA PLUG	




### Environmental & Mechanical Characteristics

Temperature	-10°C to +55°C
Humidity	95% @ 25°C
Radome color	Black

### VSWR

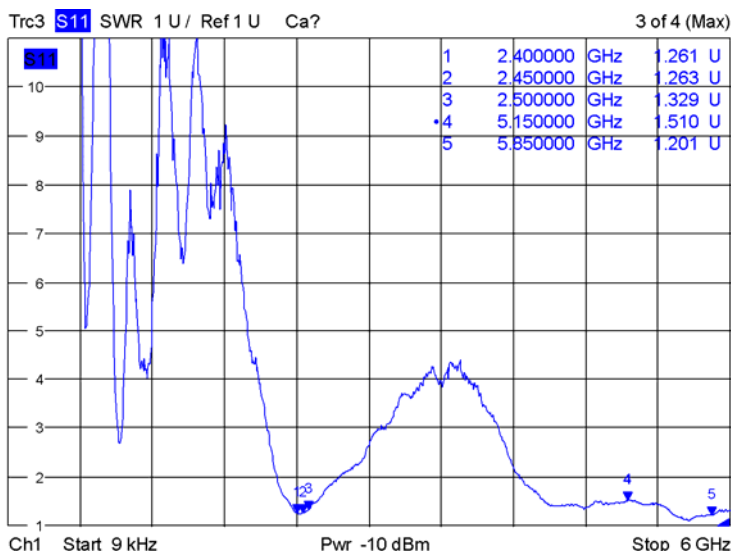


Date: 12.JUN.2015 18:43:37

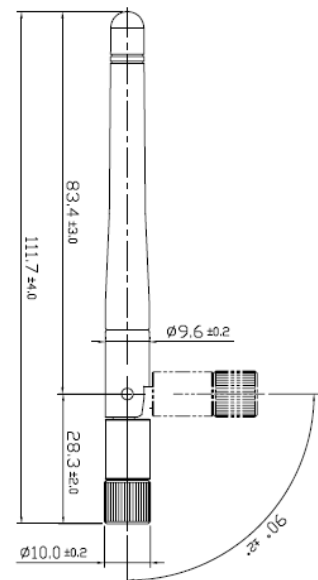

Radiation Pattern

C2-DB-N 2G Band = 2400 - 2500 MHz % 2G Band

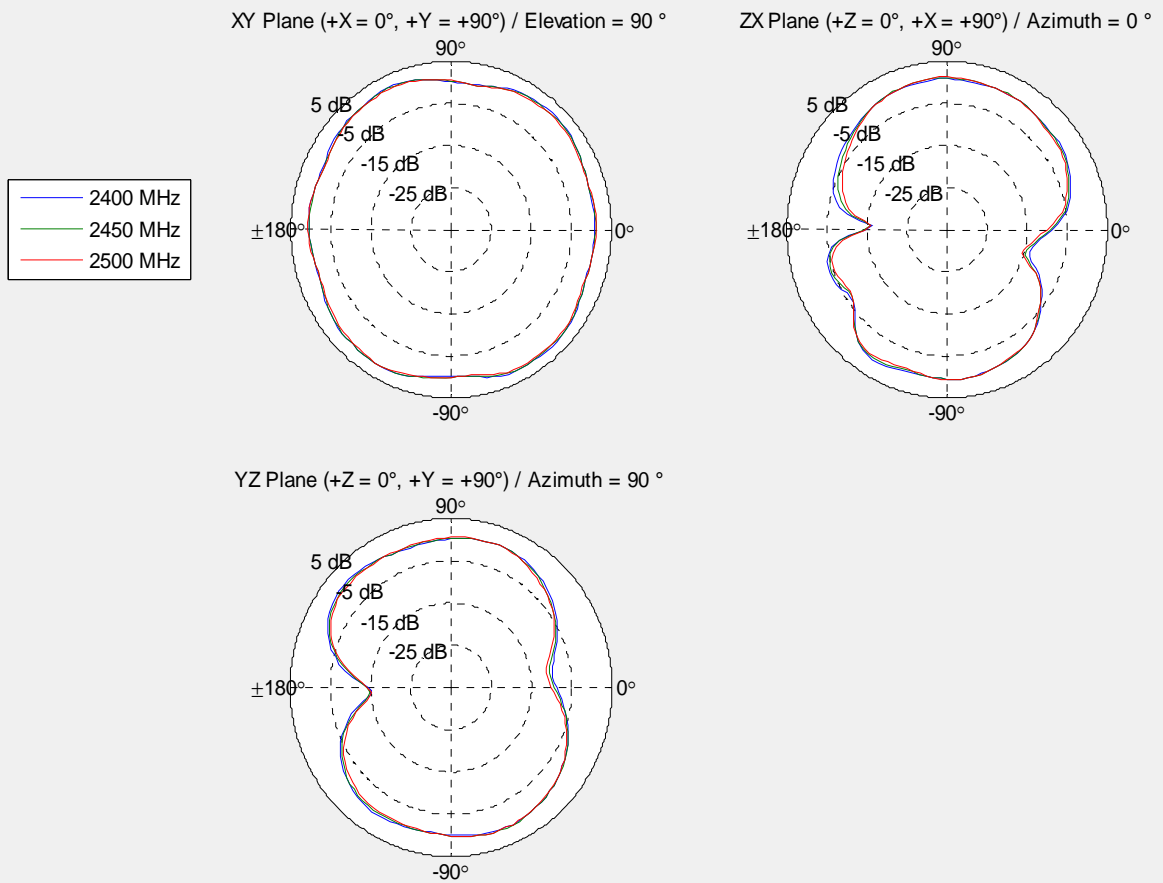

Radiation Pattern

