





<b>Prüfbericht-Nr.:</b> Test report no.:	<b>50098920 003</b>	<b>Auftrags-Nr.:</b> Order no.:	<b>168308430</b>	Seite 1 von 2 Page 1 of 2
<b>Kunden-Referenz-Nr.:</b> Client reference no.:	N/A	<b>Auftragsdatum:</b> Order date:	2021-03-05	
<b>Auftraggeber:</b> Client:	Shenzhen Fujia Appliance Co., Ltd. 5F of Building F, Hengchangrong(xinghui) Sci-Tech. Park, Huaning Road, Longhua District, Shenzhen, Guangdong, P.R. China			
<b>Prüfgegenstand:</b> Test item:	SWITCHING ADAPTER			
<b>Bezeichnung / Typ-Nr.:</b> Identification / Type no.:	FJ-SW2017xxxxxxx (for definition of variables xxx, yyyy see table A on page 2 for details) (Trade mark:  )			
<b>Auftrags-Inhalt:</b> Order content:	TÜV Rheinland GS mark approval			
<b>Prüfgrundlage:</b> Test specification:	EN 62368-1:2014+A11:2017			
<b>Wareneingangsdatum:</b> Date of sample receipt:	2021-03-05			
<b>Prüfmuster-Nr.:</b> Test sample no.:	A003010621			
<b>Prüfzeitraum:</b> Testing period:	2021-03-05			
<b>Ort der Prüfung:</b> Place of testing:	1601 R&D Room, 1602-1604, 17-18F, Building 7 Site C, Vanke Cloud City Phase I, XingKe First Street, Xili Street, Xili Community, Nanshan District, Shenzhen 518052, P.R. China			
<b>Prüflaboratorium:</b> Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
<b>Prüfergebnis*:</b> Test result*:	Pass			
<b>geprüft von:</b> tested by: Jericho Cheng			<b>genehmigt von:</b> authorized by: Jammy Zhang	
<b>Datum:</b> Date: 2021-03-12			<b>Ausstellungsdatum:</b> Issue date: 2021-03-12	
<b>Stellung / Position:</b> Project Engineer			<b>Stellung / Position:</b> Technical Certifier	
<b>Sonstiges / Other:</b> - see next page				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

V05

Prüfbericht-Nr.: **50098920 003**  
Test report no.:

Auftrags-Nr.: **168308430**  
Order no.:

Seite 2 von 2  
Page 2 of 2

**Sonstiges/ Other Aspects:**

- The test report is issued for TÜV Rheinland GS mark approval modification. This report is based on CB test reports 50098919 001 to 50098919 002 and GS reports 50098920 001 to 50098920 002 to issue new Cert. with the following changes:
  - Add new construction for filter (LF1), only add the alternative base/TIWP, and add one source of Bobbin for LF2.
  - Delete the standard: EN 60950-1: 2006+A11: 2009+A1: 2010+A12: 2011+A2: 2013.  
The submitted sample was checked and found to be without changes and the product conform to the previous tested product. No additional test required.
- Tested according to European harmonized standards. All relevant EK-decisions have been considered.
- Foreseeable use was considered. Currently neither a safeguard clause procedure has been invoked nor is an increase in accidents known for this/these product(s).
- PAK, The risk analysis, categorization and evaluation indicate that no further testing is necessary. Product complies to AfPS GS 2019:01 Par. 3.1.
- This report consists 2 pages of cover page, 12 pages of photo documentation (Attachment 1), 1 page of EMF Assessment Report (Attachment 2).

**Table A: Definition of variables:**

Variable:	Range of variable:	Content:
xxx	050-090, 095-195, 200-330, 360-540	'xxx' are 3 digits indicating 10 times the output voltage value in V. For example, 050 represents the output voltage is 5.0Vdc, 540 represents the output voltage is 54.0Vdc.
yyyy	0100 to 6000	'yyyy' are 4 digits indicating 1000 times the output current value in A. For example, 0100 represents the output current is 0.1A, 6000 represents the output current is 6.0 A.

**Table B: Model list:**

Type designation	Output Voltage range (Vdc)	Output Current Range (A)	Max. Output power (W)	Transformer
FJ-SW2017xxxxyyyy (xxx= 050-090, yyyy= 0100-6000)	5.0-9.0	0.1-6.0	54	2017-T1 (Sec winding: Φ0.45mm*6P*3Ts)
FJ-SW2017xxxxyyyy (xxx= 095-195, yyyy= 0100-6000)	9.5-19.5	0.1-6.0	65	2017-T2 (Sec winding: Φ0.45mm*4P*6Ts)
FJ-SW2017xxxxyyyy (xxx = 200-330, yyyy= 0100 - 3250)	20.0-33.0	0.1-3.25	65	2017-T3 (Sec winding: Φ0.50mm*2P*10Ts)
FJ-SW2017xxxxyyyy (xxx = 360-540, yyyy= 0100 - 1860)	36.0-54.0	0.1-1.80	65	2017-T4 (Sec winding: Φ0.45mm*2P*18Ts)

**Note:**

The rated output voltage is rising in steps of 0.1V.

The rated output current is rising in steps of 0.01A.

Output voltage multiplied with output current are only tested up to the max. output power.

**Attachment 2 to report No. 50098920 003**

**EMF Assessment**

Applicant: Shenzhen Fujia Appliance Co., Ltd.

Product name: SWITCHING ADAPTER

Model name: FJ-SW2017xxxxxxx

**The equipment is a SWITCHING ADAPTER with a low power, it does incorporate only non-intentional radiators, but does not contain radio transmitters; the typical usage, installation and physical characteristics make the equipment inherently compliant with all applicable EMF exposure levels (EN 62479:2010 clause 4.1 Route A).**

**Name of SV: Jericho Cheng**

**Date: 2021-03-12**

Certificate No. S 50497020 0001 Report No. 02-Chengje-50098920 003 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 1 of 13

License holder	:	<b>Shenzhen Fujia Appliance Co., LTD.</b> 5F of Building F, Hengchangrong(xinghui) Sci-Tech. Park, Huaning Road, Longhua District, Shenzhen, Guangdong, P.R. China
Factory	:	<b>Huizhou Fujia Appliance Tech. Co., Ltd.</b> Building B of Yaoyu Ind. Park, Shatian Town, Huiyang District, Huizhou, Guangdong, P.R. China
Type of Appliance	:	SWITCHING ADAPTER
Type Designation	:	FJ-SW2017xxxyyyy (for definition of variables xxx, yyyy see table A)
Rating	:	Input: 100-240V~, 50/60Hz, 1.5A Max. Output: See table B for details
Protection Class	:	Class I
Supply connection	:	<input type="checkbox"/> fixed power cord <input type="checkbox"/> permanent connection <input checked="" type="checkbox"/> appliance inlet <input type="checkbox"/> direct plug in <input type="checkbox"/> built-in

Additional information :

The specified maximum ambient temperature is 45°C

The output complied with LPS

Altitude: 5000m


**Table A: Definition of variables:**

Variable:	Range of variable:	Content:
xxx	050-090, 095-195, 200-330, 360-540	'xxx' are 3 digits indicating 10 times the output voltage value in V. For example, 050 represents the output voltage is 5.0Vdc, 540 represents the output voltage is 54.0Vdc.
yyyy	0100 to 6000	'yyyy' are 4 digits indicating 1000 times the output current value in A. For example, 0100 represents the output current is 0.1A, 6000 represents the output current is 6.0 A.

**Table B: Model list:**

Type designation	Output Voltage range (Vdc)	Output Current Range (A)	Max. Output power (W)	Transformer
------------------	----------------------------	--------------------------	-----------------------	-------------

TÜV Rheinland Group



2021-03-12

Date

Printed Name

Signature

12-03-2021 Henry Luo

Date

Printed Name



Stamp & Signature of license holder  
(name of authorized person)

Certificate No. S 50497020 0001 Report No. 02-Chengje-50098920 003 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 2 of 13

FJ-SW2017xxxxxxx (xxx= 050-090, yyyy= 0100-6000)	5.0-9.0	0.1-6.0	54	2017-T1 (Sec winding: Φ0.45mm*6P*3Ts)
FJ-SW2017xxxxxxx (xxx= 095-195, yyyy= 0100-6000)	9.5-19.5	0.1-6.0	65	2017-T2 (Sec winding: Φ0.45mm*4P*6Ts)
FJ-SW2017xxxxxxx (xxx = 200-330, yyyy= 0100 - 3250)	20.0-33.0	0.1-3.25	65	2017-T3 (Sec winding: Φ0.50mm*2P*10Ts)
FJ-SW2017xxxxxxx (xxx = 360-540, yyyy= 0100 - 1860)	36.0-54.0	0.1-1.80	65	2017-T4 (Sec winding: Φ0.45mm*2P*18Ts)
Note: The rated output voltage is rising in steps of 0.1V. The rated output current is rising in steps of 0.01A. Output voltage multiplied with output current are only tested up to the max. output power.				

**Critical Components**

Material: e.g. external enclosure, PCB, closed-end connector, sleeves, cord anchorage etc

Components with winding: e.g. motor, transformer, magnetic coil etc.

Other components: e.g. switch, thermostat, heater, plug, internal wire, capacitor, relay, varistor etc.

Object/part No.	Manufacturer/ trademark	Type/ model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>
Enclosure	Sabic Innovative Plastics US L L C	940(f1)	PC, V-0, 120°C, min. thickness 1.5mm	UL 94	UL
(Alternative)	SILVER AGE ENGINEERING PLASTICS (DONGGUAN) CO LTD	PC2330, PC2370(a1)(f1)	PC, V-0, 115°C, min. thickness 1.5mm	UL 94	UL
AC Inlet (CN1)	Zhejiang LECI Electronics Co., Ltd	DB-14	10A, 250Vac, Standard sheet C14, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL
(Alternative)	Zhejiang LECI Electronics Co., Ltd	DB-6	2.5A, 250Vac, Standard sheet C6, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL

TÜV Rheinland Group



2021-03-12

12-03-2021 Henry Luo

Date

Printed Name

Signature

Date

Printed Name

Stamp &amp; Signature of license holder

(name of authorized person)



Certificate No. S 50497020 0001 Report No. 02-Chengje-50098920 003 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 3 of 13

(Alternative)	DONGGUAN HUACONN ELECTRONICS CO LTD	HC-99	10A, 250Vac, Standard sheet C14, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL
(Alternative)	DONGGUAN HUACONN ELECTRONICS CO LTD	HC-66	2.5A, 250Vac, Standard sheet C6, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL
(Alternative)	Zhe Jiang Bei Er Jia Electronic Co.	ST-A01-003J	10A, 250Vac, Standard sheet C14, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL
(Alternative)	Zhe Jiang Bei Er Jia Electronic Co.	ST-A04-002	2.5A, 250Vac, Standard sheet C6, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL
(Alternative)	Rong Feng Industrial Co Ltd	SS-120	10A, 250Vac, Standard sheet C14, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL
(Alternative)	Rong Feng Industrial Co Ltd	RF-190	2.5A, 250Vac, Standard sheet C6, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL
(Alternative)	Sun Fair Electric Wire & Cable (HK) Co Ltd	S-03	10A, 250Vac, Standard sheet C14, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL
Protective bonding wire	SHENZHEN FUJIA APPLIANCE CO LTD	1672	VW-1, Min.18AWG, 105°C	UL758	UL
Fuse(F1)	XC Electronics (Shen Zhen) Corp. Ltd.	3T	T3.15AL, 250Vac	IEC/EN 60127-1 IEC/EN 60127-3 UL 248	VDE UL
(Alternative)	Shenzhen Lanson Electronics Co., Ltd.	3K Series	T3.15AL, 250Vac	IEC/EN 60127-1 IEC/EN 60127-3 UL 248	VDE UL
(Alternative)	HONG HU BLUELIGHT ELECTRONIC CO LTD	L3T	T3.15AL, 250Vac	IEC/EN 60127-1 IEC/EN 60127-3 UL 248	VDE UL
Line filter (LF1) (Optional)	Huizhou Fujia Appliance Tech. Co., Ltd.	TC1004-701U	Min.0.7mH, 130°C	IEC/EN 62368-1	Tested with appliance

TÜV Rheinland Group



2021-03-12

Date

Printed Name

Signature

12-03-2021 Henry Luo

Date

Printed Name



Stamp & Signature of license holder  
(name of authorized person)

Certificate No. S 50497020 0001 Report No. 02-Chengje-50098920 003 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 4 of 13

- Triple insulated wire	Furukawa Electric Co., Ltd.	TEX-E	130°C	IEC/EN/UL 62368-1	VDE UL
(Alternative)	HUIZHOU HUAYING ELECTRONIC TECHNOLOGY CO LTD	MIW-B	130°C	IEC/EN/UL 62368-1	VDE UL
(Alternative)	SHENZHEN KAIZHONG HEDONG NEW MATERIALS CO LTD	TIW-B	130°C	IEC/EN/UL 62368-1	VDE UL
- Bobbin (Optional)	Sumitomo Bakelite Co. Ltd	PM-9820, PM-9630	Phenolic, V-0, 150°C, Min. thickness 0.9 mm	UL 94	UL
(Alternative)	Chang Chun Plastics	4130(100%Virgin) (a)(b)	PBT, V-0, 140 °C, Min. thickness 0.9 mm	UL94	UL
(Alternative)	Chang Chun Plastics	T-378J	PMC, V-0, 150 °C, Min. thickness 0.9 mm	UL94	UL
Line filter (LF2) (Optional)	Interchangeable	Interchangeable	Min.12mH,130°C	IEC/EN 62368-1	Tested with appliance
- Bobbin	Sumitomo Bakelite Co. Ltd	PM-9820, PM-9630	Phenolic, V-0, 150°C, Min. thickness 0.9 mm	UL 94	UL
(Alternative)	Chang Chun Plastics	4130(100%Virgin) (a)(b)	PBT, V-0, 140 °C, Min. thickness 0.9 mm	UL94	UL
(Alternative)	Chang Chun Plastics	T-378J	PMC, V-0, 150 °C, Min. thickness 0.9 mm	UL94	UL
- Insulation tape	3M Corp	1350F-1(b), 1350-1(c)	130°C	UL 510	UL
(Alternative)	Jingjiang Yahua Pressure Sensitive Glue Co Ltd	CT*(c)(g), PZ*(b)	130°C	UL 510	UL

TÜV Rheinland Group



2021-03-12

Date

Printed Name

Signature

12-03-2021 Henry Luo

Date

Printed Name



Stamp & Signature of license holder  
(name of authorized person)

Certificate No. S 50497020 0001 Report No. 02-Chengje-50098920 003 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 5 of 13

X-Capacitor (CX1) (optional)	Shantou High- New Technology Development Zone Songtian Enterprise Co	MPX	Max. 0.47μF, min. 250Vac, 110°C, X2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	XIAMEN WANMING ELECTRONICS CO LTD	MPX	Max. 0.47μF, min. 250Vac, 110°C, X2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	DONGGUAN TOPCAP TECHNOLOGY CO LTD	MPX	Max. 0.47μF, min. 250Vac, 110°C, X2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	DONGGUAN CITY DAFU ELECTRONICS CO LTD	MPX	Max. 0.47μF, min. 250Vac, 110°C, X2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Dongguan Easy- Gather Electronic Co Ltd	MKP-X2	Max. 0.47μF, min. 250Vac, 105°C, X2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Carli Electronics Co.,Ltd	MPX	Max. 0.47μF, min. 250Vac, 100°C, X2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	MPX/MKP	Max. 0.47μF, min. 250Vac, 110°C, X2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Tenta Electric Industrial Co Ltd	MEX	Max. 0.47μF, min. 250Vac, 110°C, X2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Dain Electronics Co Ltd	MPX	Max. 0.47μF, min. 250Vac, 110°C, X2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	SHENZHEN HAOTIAN ELECTRONIC CO LTD	MPX	Max. 0.47μF, min. 250Vac, 105°C, X2 type	IEC/EN/UL 60384-14	VDE UL

TÜV Rheinland Group



2021-03-12

Date

Printed Name

Signature

12-03-2021 Henry Luo

Date

Printed Name


 Stamp & Signature of license holder  
(name of authorized person)

**Constructional Data Form (CDF) for Electrical Appliances**

Page 6 of 13

Bridge capacitor (CY1, CY2) (when CY1&CY2 in series use) (optional)	Shantou High-New Technology Development Zone Songtian Enterprise Co Ltd	CD (for Y1 type), CE (for Y2 type)	Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	GUANGDONG SOUTH HONGMING ELECTRONIC SCIENCE & TECHNOLOGY CO LTD	F	Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Dongguan Cigu Electronic	CD (Y1), CE (Y2)	Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	DONGGUAN CITY DAFU ELECTRONICS CO LTD	CT7 Y1, CT7 Y2	Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	XIAMEN WANMING ELECTRONICS CO LTD	CK (for Y1 type), CM (for Y2 type)	Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Dongguan Easy-Gather Electronic Co Ltd	DCF	Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Jya-Nay Co Ltd	JN	Max. 3300pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	TUV UL
(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	YO-series (Y1), YT(Y2)	Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN 60384-14	VDE
(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	YOF (Y1), YT (Y2)	Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	UL 60384-14	UL
(Alternative)	Murata Mfg Co Ltd	KX	Max. 3300pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	VDE UL



Certificate No. S 50497020 0001 Report No. 02-Chengje-50098920 003 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 7 of 13

(Alternative)	SHENZHEN HAOTIAN ELECTRONIC CO LTD	HT (Y1), HTC (Y2)	Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
Bridge capacitor (CY1) (when CY2 not use) (optional)	Shantou High-New Technology Development Zone Songtian Enterprise Co Ltd	CD	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	GUANGDONG SOUTH HONGMING ELECTRONIC SCIENCE & TECHNOLOGY CO LTD	F	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Dongguan Cigu Electronic	CD	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	DONGGUAN CITY DAFU ELECTRONICS CO LTD	CT7 Y1	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	XIAMEN WANMING ELECTRONICS CO LTD	CK	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Dongguan Easy- Gather Electronic Co Ltd	DCF	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Jya-Nay Co Ltd	JN	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	TUV UL
(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	YO-series	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN 60384- 14	VDE
(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	YOF	Max. 2200pF, min. 250Vac, 125°C, Y1 type	UL 60384-14	UL

TÜV Rheinland Group



2021-03-12

Date

Printed Name

Signature

12-03-2021 Henry Luo

Date

Printed Name



Stamp &amp; Signature of license holder

(name of authorized person)

Certificate No. S 50497020 0001 Report No. 02-Chengje-50098920 003 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 8 of 13

(Alternative)	Murata Mfg Co Ltd	KX	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	SHENZHEN HAOTIAN ELECTRONIC CO LTD	HT	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	VDE UL
Bridge capacitor (CY3, CY4) (optional)	Shantou High-New Technology Development Zone Songtian Enterprise Co Ltd	CD (for Y1 type) CE (for Y2 type)	Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	GUANGDONG SOUTH HONGMING ELECTRONIC SCIENCE & TECHNOLOGY CO LTD	F	Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Dongguan Cigu Electronic	CD (Y1), CE (Y2)	Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	DONGGUAN CITY DAFU ELECTRONICS CO LTD	CT7 Y1, CT7 Y2	Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	XIAMEN WANMING ELECTRONICS CO LTD	CK (for Y1 type), CM (for Y2 type)	Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Dongguan Easy-Gather Electronic Co Ltd	DCF	Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Jya-Nay Co Ltd	JN	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	TUV UL
(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	YO-series (Y1), YT(Y2)	Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN 60384-14	VDE

TÜV Rheinland Group



2021-03-12

Date

Printed Name

Signature

12-03-2021 Henry Luo

Date

Printed Name



Stamp & Signature of license holder  
(name of authorized person)

Certificate No. S 50497020 0001 Report No. 02-Chengje-50098920 003 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 9 of 13

(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	YOF (Y1), YT (Y2)	Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	UL 60384-14	UL
(Alternative)	Murata Mfg Co Ltd	KX	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	SHENZHEN HAOTIAN ELECTRONIC CO LTD	HT (Y1), HTC (Y2)	Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
Varistor (RV1) (Optional)	Shantou High-New Technology Development Zone Songtian Enterprise Co Ltd	10D471K, 10D511K, 14D471K, 14D511K	Min. 300V ac, 105°C, (tested for 6KV/3KA combination pulse), coating V-0	IEC/EN 61051-1 UL 1449	VDE UL
(Alternative)	XIAMEN WANMING ELECTRONICS CO LTD	WMR10D471K-2, WMR10D471K-3, WMR10D511K-2, WMR10D511K-3, WMR14D471K-2, WMR14D471K-3, WMR14D511K-2, WMR14D511K-3	Min. 300V ac, Min. 105°C, (tested by UL for 6KV/3KA combination pulse), coating V-0	IEC/EN 61051-1 UL 1449	VDE UL
(Alternative)	Thinking Electronic Industrial Co Ltd	TVR14471, TVR14511, TVR14561, TVR14621, TVR10471, TVR10511, TVR10561, TVR10621	Min. 300V ac, 105°C, (tested for 6KV/3KA combination pulse), coating V-0	IEC/EN 61051-1 UL 1449	VDE UL
(Alternative)	Lien Shun Technical Co Ltd	10D471K, 10D511K, 14D471K, 14D511K	Min. 300V ac, 105°C, (tested for 6KV/3KA combination pulse), coating V-0	IEC/EN 61051-1 UL 1449	VDE UL

TÜV Rheinland Group



2021-03-12

Date

Printed Name

Signature

12-03-2021 Henry Luo

Date

Printed Name



Stamp & Signature of license holder  
(name of authorized person)

Certificate No. S 50497020 0001 Report No. 02-Chengje-50098920 003 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 10 of 13

(Alternative)	Success Electronics Co Ltd	SVR14D471K, SVR14D511K, SVR10D471K, SVR10D511K	Min. 300V ac, Min.105°C, (tested by UL for 6KV/3KA combination pulse), coating V-0	IEC/EN 61051-1 IEC/EN 61051-2 UL 1449	VDE UL
(Alternative)	Centra Science Corp	CNR-14D471K, CNR-10D471K, CNR-10V471K, CNR-10V511K, CNR-10V561K, CNR-14V471K, CNR-14V511K, CNR-14V561K	Min. 300V ac, Min.105°C, (tested by UL for 6KV/3KA combination pulse), coating V-0	IEC/EN 61051-1 IEC/EN 61051-2 UL 1449	VDE UL
Opto-coupler (OP1)	Everlight Electronics Co Ltd	EL1018, EL1019	Ext. Dcr. = 8.1mm 110°C	IEC/EN 60747-5-5, UL 1577	VDE UL
(Alternative)	CHINA RESOURCES SEMICONDUCTOR(SHENZHEN)LIMITED	1018, 1019, HK1018, HK1019	Ext. Dcr. = 8.0mm 110°C	IEC/EN 60747-5-5, UL 1577	VDE UL
(Alternative)	CT Micro International Corporation	CT1018, CT1019	Ext. Dcr. = 8.0mm 110°C	IEC/EN 60747-5-5, UL 1577	VDE UL
Opto-coupler (OP2) (optional)	Everlight Electronics Co Ltd	EL1018, EL1019	Ext. Dcr. = 8.1mm 110°C	IEC/EN 60747-5-5, UL 1577	VDE UL
(Alternative)	CHINA RESOURCES SEMICONDUCTOR(SHENZHEN)LIMITED	1018, 1019, HK1018, HK1019	Ext. Dcr. = 8.0mm 110°C	IEC/EN 60747-5-5, UL 1577	VDE UL
(Alternative)	CT Micro International Corporation	CT1018, CT1019	Ext. Dcr. = 8.0mm 110°C	IEC/EN 60747-5-5, UL 1577	VDE UL
Insulation cover on transformer	E I DUPONT DE NEMOURS & CO INC	FR530(I)(+)(f1), FR530L(I)(+)(f1)	V-0, 155 °C. min. thickness 0.4mm	UL 94	UL

TÜV Rheinland Group



2021-03-12

Date

Printed Name

Signature

12-03-2021 Henry Luo

Date

Printed Name



罗德市福佳电器有限公司  
Stamp & Signature of license holder  
(name of authorized person)

Certificate No. S 50497020 0001 Report No. 02-Chengje-50098920 003 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 11 of 13

Transformer (T2)	Shenzhen Fujia Appliance Co., Ltd.	2017-T1 (for output voltage 5.0-9.0V) 2017-T2 (for output voltage 9.5-19.5V) 2017-T3 (for output voltage 20.0-33.0V) 2017-T4 (for output voltage 36.0-54.0V)	Class B	Applicable part of IEC/EN 62368-1 and according to IEC 60085	Tested with appliance
- Bobbin	Sumitomo Bakelite Co. Ltd	PM-9820, PM-9630	Phenolic, V-0, 150°C, Min. thickness 0.9 mm	UL 94	UL
(Alternative)	Chang Chun Plastics	4130(100%Virgin) (a)(b)	PBT, V-0, 140 °C Min. thickness 0.9 mm	UL94	UL
- Secondary Triple insulated wire	Furukawa Electric Co.,Ltd.	TEX-E	130°C	IEC/EN 62368-1 UL 2353	VDE UL
-Tube	Great Holding Industrial Co Ltd	TFL, TFS, TFT	200°C	UL 224	UL
(Alternative)	Zeus Industrial Products Inc	TFE-LW-150, TFE-TW-300, TFE-SW-600	200°C	UL 224	UL
- Insulation tape	3M Corp	1350F-1(b), 1350-1(c)	130°C	UL 510	UL
(Alternative)	Jinjiang Yahua Sticking Tape Co Ltd	CT*(c)(g), PZ*(b)	130°C	UL 510	UL
(Alternate)	P Leo & Co (B C) Ltd	1P801, 1P802	130°C	UL 510	UL
-Varnish	Hitachi Chemical Co	WP-2952F-2G	130°C	UL 1446	UL

TÜV Rheinland Group



2021-03-12

Date

Printed Name

Signature

12-03-2021 Henry Luo

Date

Printed Name



Stamp & Signature of licenseholder  
(name of authorized person)

Certificate No. S 50497020 0001 Report No. 02-Chengje-50098920 003 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 12 of 13

(Alternative)	ELANTAS ELECTRICAL INSULATION ELANTAS PDG INC	468-2(d)	130°C	UL 1446	UL
---------------	---	----------	-------	---------	----

Note:

- 1) Bridge capacitor CY2 can not be used alone.
- 2) Opto-coupler OP2 is optional only for output voltage  $\leq 33\text{Vdc}$  models, The other models it is provided.

**Functional Components**

Components which are required for performance purposes and not directly addressed by a component standard or product standard: Ripple capacitors, Mosfets, PCB, etc.

Object/part No.	Type/ model (optional)	Technical data
Protective bonding wire	Interchangeable	VW-1, Min.18AWG, 105°C
Output cord	Interchangeable	VW-1, 300V, Min. 24AWG, min. 80 °C
PCB	Interchangeable	V-0, 130°C
Thermistor (RT1) (optional)	Interchangeable	Min.3.0 A, Min.1.0Ω, at 25°C
Heat shrinkable tube used on F1, LF2	Interchangeable	VW-1, 600V, 125°C
Line filter (LF1) (Optional)	Interchangeable	Min.0.7mH, 130°C
Magnet wire	Interchangeable	130°C
Line filter (LF2) (Optional)	Interchangeable	Min.12mH,130°C
Bridge diode (BD1)	Interchangeable	Min. 2.0A, min. 600V
Electrolytic capacitor (C6)	Interchangeable	68-200μF, min. 400Vdc, min. 105°C
Transistor (Q3)	Interchangeable	Min. 7A, min. 600V
Current sense resistor (R1)	Interchangeable	Min. 0.47 ohm, Min. 1/2 W
Current sense resistor (R5) (output power<36W no	Interchangeable	Min. 0.47 ohm, Min. 1/4 W

TÜV Rheinland Group



2021-03-12

Date

Printed Name

Signature

12-03-2021 Henry Luo

Date

Printed Name

Stamp &amp; Signature of license holder

(name of authorized person)



Certificate No. S 50497020 0001 Report No. 02-Chengje-50098920 003 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 13 of 13

**Functional Components**

Components which are required for performance purposes and not directly addressed by a component standard or product standard: Ripple capacitors, Mosfets, PCB, etc.

Object/part No.	Type/ model (optional)	Technical data
t provided, $\geq 36W$ optional)		
Current sense resistor (R29) (output power $< 36W$ not provided, $\geq 36W$ optional)	Interchangeable	Min. 0.47 ohm, Min. 1/4 W
Bleeder resistor (R2, R3, R37, R38)	Interchangeable	Each max. 1.8M ohm, min. 1/4 W

TÜV Rheinland Group



2021-03-12

Date

Printed Name

Signature

12-03-2021 Henry Luo

Date

Printed Name



罗衡

Stamp & Signature of licenseholder  
(name of authorized person)

<b>Prüfbericht-Nr.:</b> Test report no.:	<b>50098920 004</b>	<b>Auftrags-Nr.:</b> Order no.:	<b>168443149</b>	<b>Seite 1 von 3</b> Page 1 of 3
<b>Kunden-Referenz-Nr.:</b> Client reference no.:	N/A	<b>Auftragsdatum:</b> Order date:	2023-09-06	
<b>Auftraggeber:</b> Client:	<b>Shenzhen Fujia Appliance Co., Ltd.</b> 5F of Building F, Hengchangrong (xinghui) Sci-Tech. Park, Huaning Road, Longhua District, Shenzhen, Guangdong, China			
<b>Prüfgegenstand:</b> Test item:	SWITCHING ADAPTER			
<b>Bezeichnung / Typ-Nr.:</b> Identification / Type no.:	FJ-SW2017xxxxxxx (for definition of variables xxx, yyyy see table A in original report for details) (Trade mark:  )			
<b>Auftrags-Inhalt:</b> Order content:	TÜV Rheinland GS mark approval			
<b>Prüfgrundlage:</b> Test specification:	<b>EN 62368-1:2014+A11:2017</b> <b>EK1 527-12 Rev.2</b>			
<b>Wareneingangsdatum:</b> Date of sample receipt:	2023-09-06			
<b>Prüfmuster-Nr.:</b> Test sample no.:	A003557567			
<b>Prüfzeitraum:</b> Testing period:	2023-09-06 to 2023-09-11			
<b>Ort der Prüfung:</b> Place of testing:	1601-1604, 17-18/F., Tower A, Building 2, Shenzhen International Innovation Valley, Dashi 1st Road, Xili Street, Xili Community, Nanshan District, Shenzhen, Guangdong, China			
<b>Prüflaboratorium:</b> Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
<b>Prüfergebnis*:</b> Test result*:	Pass			
<b>geprüft von:</b> tested by: Jericho Cheng		<b>genehmigt von:</b> authorized by: Edward Xie		
<b>Datum:</b> Date: 2023-09-12		<b>Ausstellungsdatum:</b> Issue date: 2023-09-12		
<b>Stellung / Position:</b>	Project Engineer	<b>Stellung / Position:</b>	Authoriser	
<b>Sonstiges / Other:</b>	- see next pages			
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) * Legend: P(ass) = passed a.m. test specification(s)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n) F(ail) = failed a.m. test specification(s)	N/A = nicht anwendbar N/A = not applicable	N/T = nicht getestet N/T = not tested	
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht-Nr.: 50098920 004  
Test report no.:

Seite 2 von 3  
Page 2 of 3

**Anmerkungen**  
*Remarks*

1	<p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p>
2	<p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</i></p>
3	<p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p>
4	<p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p>

Prüfbericht-Nr.: 50098920 004  
Test report no.:

Seite 3 von 3  
Page 3 of 3

**Anmerkungen**  
*Remarks*

**Other Aspects / Sonstiges:**

1. The test report is issued for TÜV Rheinland GS mark approval. This report is based on TÜV Rheinland CB test reports 50098919 001 with Ref. Certif. No. JPTUV-083261, 50098919 002 with Ref. Certif. No. JPTUV-083261-M1 and GS reports 50098920 001 with Ref. Certif. No. S 50388254 0001-0002, 50098920 002 with Ref. Certif. No. S 50388254 0003, 50098920 003 with Ref. Certif. No. S 50497020 0001-0002 for models mentioned above with the following changes:
  1. Update critical components list due to add alternative source and change the description, and those changes were not affect safety.
  2. Add EK1 527-12 Rev.2.
  3. Add alternative output plug for all models.After having inspected and determined, all components and constructions found in the sample are identical to the components and constructions identified in the CB test reports. No additional test need to be considered.
2. The testing laboratory of CB test report is accredited test laboratory by ZLS and have relevant scope.
3. Tested according to European harmonized standards. All relevant EK-decisions have been considered.
4. Foreseeable use was considered. Currently neither a safeguard clause procedure has been invoked nor is an increase in accidents known for this/these product(s).
5. PAK, The risk analysis, categorization and evaluation indicate that no further testing is necessary. Product complies to AfPS GS 2019:01 Par. 3.1.
6. Evaluation of this product to the applied standard EN 62368-1:2014+A11:2017 is based on the published European deviations issued as part of the standard published by CENELEC. Evaluation in addition to the requirements of the Low voltage directive has been performed in addition to take into account any risks not covered by the published EN standard EN 62368-1:2014+A11:2017 if any
7. This report consists: 3 pages of this cover page, 1 page of EMF Assessment Report (Attachment 1).

Output terminal view:



**Attachment 1 to report No. 50098920 004**

**EMF Assessment**

Applicant: Shenzhen Fujia Appliance Co., Ltd.

Product name: SWITCHING ADAPTER

Model name: FJ-SW2017xxxxxxx

**The equipment is a SWITCHING ADAPTER with a low power, it does incorporate only non-intentional radiators, but does not contain radio transmitters; the typical usage, installation and physical characteristics make the equipment inherently compliant with all applicable EMF exposure levels (EN 62479:2010 clause 4.1 Route A).**

**Name of SV: Jericho Cheng**

**Date: 2023-09-11**

Certificate No. S 50497020 0003 Report No. 02-Chengje-50098920 004 Appendix No. 1

## Constructional Data Form (CDF) for Electrical Appliances

Page 1 of 12

License holder : **Shenzhen Fujia Appliance Co., LTD.**  
5F of Building F, Hengchangrong(xinghui) Sci-Tech. Park, Huaning Road, Longhua District, Shenzhen, Guangdong, P.R. China

Factory : **Huizhou Fujia Appliance Tech. Co., Ltd.**  
Building B of Yaoyu Ind. Park, Shatian Town, Huiyang District Huizhou 516269 Guangdong P.R. China

Type of Appliance : SWITCHING ADAPTER

Type Designation : FJ-SW2017xxxyyy (for definition of variables xxx, yyyy see table A)

Rating : Input: 100-240V~, 50/60Hz, 1.5A Max.  
Output: See table B for details

Protection Class : Class I

Supply connection : ☐ fixed power cord  
☐ permanent connection  
☒ appliance inlet  
☐ direct plug in  
☐ built-in

Additional information :

The specified maximum ambient temperature is 45°C

The output complied with LPS

Altitude: 5000m

TÜV Rheinland Group



2023-09-11

Date

Printed Name

Signature

2023-09-11 Henry Luo

Date

Printed Name

Stamp & Signature of licenseholder  
(name of authorized person)

Certificate No. S 50497020 0003 Report No. 02-Chengje-50098920 004 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 2 of 12

**Table A: Definition of variables:**

Variable:	Range of variable:	Content:
xxx	050-090, 095-195, 200-330, 360-540	'xxx' are 3 digits indicating 10 times the output voltage value in V. For example, 050 represents the output voltage is 5.0Vdc, 540 represents the output voltage is 54.0Vdc.
yyyy	0100 to 6000	'yyyy' are 4 digits indicating 1000 times the output current value in A. For example, 0100 represents the output current is 0.1A, 6000 represents the output current is 6.0 A.

**Table B: Model list:**

Type designation	Output Voltage range (Vdc)	Output Current Range (A)	Max. Output power (W)	Transformer
FJ-SW2017xxxxyyy (xxx= 050-090, yyyy= 0100-6000)	5.0-9.0	0.1-6.0	54	2017-T1 (Sec winding: Φ0.45mm*6P*3Ts)
FJ-SW2017xxxxyyy (xxx= 095-195, yyyy= 0100-6000)	9.5-19.5	0.1-6.0	65	2017-T2 (Sec winding: Φ0.45mm*4P*6Ts)
FJ-SW2017xxxxyyy (xxx = 200-330, yyyy= 0100-3250)	20.0-33.0	0.1-3.25	65	2017-T3 (Sec winding: Φ0.50mm*2P*10Ts)
FJ-SW2017xxxxyyy (xxx = 360-540, yyyy= 0100 - 1800)	36.0-54.0	0.1-1.80	65	2017-T4 (Sec winding: Φ0.45mm*2P*18Ts)
Note: The rated output voltage is rising in steps of 0.1V. The rated output current is rising in steps of 0.01A. Output voltage multiplied with output current are only tested up to the max. output power.				

TÜV Rheinland Group



2023-09-11

Date

Printed Name

Signature

2023-09-11 Henry Luo

Date

Printed Name

 Stamp & Signature of licenseholder  
 (name of authorized person)


Certificate No. S 50497020 0003 Report No. 02-Chengje-50098920 004 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 3 of 12

**Critical Components**

Material: e.g. external enclosure, PCB, closed-end connector, sleeves, cord anchorage etc

Components with winding: e.g. motor, transformer, magnetic coil etc.

Other components: e.g. switch, thermostat, heater, plug, internal wire, capacitor, relay, varistor etc.

Object/part No.	Manufacturer/ trademark	Type/ model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>
Enclosure	Sabic Innovative Plastics US L L C	<b>940(f1)(gg*)</b>	PC, V-0, 120°C, min. thickness 1.5mm	UL 94	UL
(Alternative)	SILVER AGE ENGINEERING PLASTICS (DONGGUAN) CO LTD	<b>PC2330</b>	PC, V-0, 115°C, min. thickness 1.5mm	UL 94	UL
<b>AC Inlet (CN1)</b>	<b>LECI Electronics Co., Ltd</b>	<b>DB-14</b>	<b>10A, 250Vac, Standard sheet C14, 70°C</b>	<b>IEC/EN 60320-1 UL 60320-1</b>	<b>VDE UL</b>
(Alternative)	LECI Electronics Co., Ltd	DB-6	2.5A, 250Vac, Standard sheet C6, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL
(Alternative)	DONGGUAN HUACONN ELECTRONICS CO LTD	HC-99	10A, 250Vac, Standard sheet C14, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL
(Alternative)	DONGGUAN HUACONN ELECTRONICS CO LTD	HC-66	2.5A, 250Vac, Standard sheet C6, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL
(Alternative)	Zhe Jiang Bei Er Jia Electronic Co.	ST-A01-003J	10A, 250Vac, Standard sheet C14, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL
(Alternative)	Zhe Jiang Bei Er Jia Electronic Co.	ST-A04-002	2.5A, 250Vac, Standard sheet C6, 70°C	IEC/EN 60320-1 UL 60320-1	VDE UL
Protective bonding wire	SHENZHEN FUJIA APPLIANCE CO LTD	1672	VW-1, Min.18AWG, 105°C	UL758	UL

TÜV Rheinland Group



2023-09-11

Date

Printed Name

Signature

2023-09-11 Henry Luo

Date

Printed Name

Stamp & Signature of licenseholder  
(name of authorized person)



Certificate No. S 50497020 0003 Report No. 02-Chengje-50098920 004 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 4 of 12

Fuse(F1)	XC Electronics (Shen Zhen) Corp. Ltd.	3T	T3.15AL, 250Vac	IEC/EN 60127-1 IEC/EN 60127-3 UL 248	VDE UL
(Alternative)	Shenzhen Lanson Electronics Co., Ltd.	3K Series	T3.15AL, 250Vac	IEC/EN 60127-1 IEC/EN 60127-3 UL 248	VDE UL
(Alternative)	HONG HU BLUELIGHT ELECTRONIC CO LTD	L3T	T3.15AL, 250Vac	IEC/EN 60127-1 IEC/EN 60127-3 UL 248	VDE UL
Line filter (LF1) (Optional)	Huizhou Fujia Appliance Tech. Co., Ltd.	TC1004-701U	Min.0.7mH, 130°C	IEC/EN 62368-1	Tested with appliance
- Triple insulated wire	Furukawa Electric Co., Ltd.	TEX-E	130°C	IEC/EN/UL 62368-1	VDE UL
(Alternative)	HUIZHOU HUAYING ELECTRONIC TECHNOLOGY CO LTD	MIW-B	130°C	IEC/EN/UL 62368-1	VDE UL
(Alternative)	SHENZHEN KAIZHONG HEDONG NEW MATERIALS CO LTD	TIW-B	130°C	IEC/EN/UL 62368-1	VDE UL
(Alternative)	Shanghai Lucky Trade Co Ltd	TIW-B	Min.130°C	IEC/EN 62368-1 UL 2353	VDE UL
(Alternative)	SHENZHEN JIUDING NEW MATERIAL CO., LTD.	DTFW-B, DTFW-F	Min. 130°C	IEC/EN 62368-1 UL 2353	VDE UL
- Bobbin (Optional)	Sumitomo Bakelite Co. Ltd	PM-9820, PM-9630, PM-9823	Phenolic, V-0, 150°C, Min. thickness 0.9 mm	UL 94	UL
(Alternative)	Chang Chun Plastics	T-378J, T378J, T375J(G5)(G6), T375HF	PMC, V-0, 150 °C, Min. thickness 0.9 mm	UL94	UL

TÜV Rheinland Group



2023-09-11

Date

Printed Name

Signature

2023-09-11 Henry Luo

Date

Printed Name

 Stamp & Signature of licenseholder  
 (name of authorized person)


Certificate No. S 50497020 0003 Report No. 02-Chengje-50098920 004 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 5 of 12

Line filter (LF2) (Optional)	Interchangeable	Interchangeable	Min.12mH,130°C	IEC/EN 62368-1	Tested with appliance
- Bobbin (Optional)	Sumitomo Bakelite Co. Ltd	PM-9820, PM-9630, PM-9823	Phenolic, V-0, 150°C, Min. thickness 0.9 mm	UL 94	UL
(Alternative)	Chang Chun Plastics	T-378J, T378J, T375J(G5)(G6), T375HF	PMC, V-0, 150 °C, Min. thickness 0.9 mm	UL94	UL
- Insulation tape	3M Corp	1350F-1(b), 1350- 1(c)	130°C	UL 510	UL
(Alternative)	Jingjiang Yahua Pressure Sensitive Glue Co Ltd	CT*(c)(g), PZ*(b)	130°C	UL 510	UL
(Alternative)	CHANG SHU LIANG YI TAPE INDUSTRY CO LTD	LY-XX Series	130°C	UL 510	UL
(Alternative)	SHEN ZHEN XINHUAHUI ELECTRONIC MATERIALS CO LTD	HMT, HWT	130°C	UL 510	UL
(Alternative)	DONGGUAN SHIN YAHUA ELECTRONIC MATERIAL CO LTD	CT* (b)(g), CT* (c)(g), PZ* (b), WF* (c)(h)	130°C	UL 510	UL
X-Capacitor (CX1) (optional)	Shantou High- New Technology Development Zone Songtian Enterprise Co	MPX	Max. 0.47µF, min. 250Vac, 110°C, X2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	DONGGUAN CITY DAFU ELECTRONICS CO LTD	MPX	Max. 0.47µF, min. 250Vac, 110°C, X2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Dongguan Cigu Electronic Technology Co., Ltd	MPX	Max.0.47µF± 10%, min. 250Vac, 110°C, X2 type	IEC/EN/UL 60384-14	VDE UL

TÜV Rheinland Group



2023-09-11

Date

Printed Name

Signature

2023-09-11 Henry Luo

Date

Printed Name


 Stamp & Signature of licenseholder  
(name of authorized person)

Certificate No. S 50497020 0003 Report No. 02-Chengje-50098920 004 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 6 of 12

(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	MPX/MKP	Max. 0.47 $\mu$ F, min. 250Vac, 110°C, X2 type	IEC/EN/UL 60384-14	VDE UL
Bridge capacitor (CY1, CY2) (when CY1&CY2 in series use) (optional)	Shantou High-New Technology Development Zone Songtian Enterprise Co Ltd	CD (for Y1 type), CE (for Y2 type)	Each Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Dongguan Cigu Electronic	CD (Y1), CE (Y2)	Each Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	DONGGUAN CITY DAFU ELECTRONICS CO LTD	CT7 Y1, CT7 Y2	Each Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	YO-series (Y1), YT(Y2)	Each Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN 60384-14	VDE
(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	YOF (Y1), YT (Y2)	Each Max. 3300pF, min. 250Vac, 125°C, Y1 or Y2 type	UL 60384-14	UL
Bridge capacitor (CY1) (when CY2 not use) (optional)	Shantou High-New Technology Development Zone Songtian Enterprise Co Ltd	CD	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Dongguan Cigu Electronic	CD	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	DONGGUAN CITY DAFU ELECTRONICS CO LTD	CT7 Y1	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN/UL 60384-14	VDE UL

TÜV Rheinland Group



2023-09-11

Date

Printed Name

Signature

2023-09-11 Henry Luo

Date

Printed Name

 Stamp & Signature of licenseholder  
 (name of authorized person)


Certificate No. S 50497020 0003 Report No. 02-Chengje-50098920 004 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 7 of 12

(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	YO-series	Max. 2200pF, min. 250Vac, 125°C, Y1 type	IEC/EN 60384-14	VDE
(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	YOF	Max. 2200pF, min. 250Vac, 125°C, Y1 type	UL 60384-14	UL
Bridge capacitor (CY3, CY4) (optional)	Shantou High-New Technology Development Zone Songtian Enterprise Co Ltd	CD (for Y1 type) CE (for Y2 type)	Each Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	Dongguan Cigu Electronic	CD (Y1), CE (Y2)	Each Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	DONGGUAN CITY DAFU ELECTRONICS CO LTD	CT7 Y1, CT7 Y2	Each Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN/UL 60384-14	VDE UL
(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	YO-series (Y1), YT(Y2)	Each Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	IEC/EN 60384-14	VDE
(Alternative)	XIANGTAI ELECTRONIC (SHENZHEN) CO LTD	YOF (Y1), YT (Y2)	Each Max. 2200pF, min. 250Vac, 125°C, Y1 or Y2 type	UL 60384-14	UL
Varistor (RV1) (Optional)	Shantou High-New Technology Development Zone Songtian Enterprise Co Ltd	10D471K, 10D621K	Min. 300V ac, Min. 105°C, (tested for 6KV/3KA combination pulse), coating V-0	IEC/EN 61051-1 UL 1449	VDE UL
(Alternative)	Cerglass MFG Inc	10D471K, 10D621K	Min. 300V ac, Min. 105°C, (tested for 6KV/3KA combination pulse), coating V-0	IEC 61051-1 IEC 61051-2 IEC 61051-2-2 UL1449	VDE UL

TÜV Rheinland Group



2023-09-11

Date

Printed Name

Signature

2023-09-11 Henry Luo

Date

Printed Name

 Stamp & Signature of licenseholder  
(name of authorized person)


Certificate No. S 50497020 0003 Report No. 02-Chengje-50098920 004 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 8 of 12

(Alternative)	DONGGUAN CITY DAFU ELECTRONICS CO LTD	10D471K, 10D621K (for VDE) NDF10D471K, NDF10D621K (for UL)	Min. 300V ac, Min. 105°C, (tested for 6KV/3KA combination pulse), coating V- 0	IEC 61051-1 IEC 61051-2 IEC 61051-2-2 UL1449	VDE UL
Opto-coupler (OP1)	Everlight Electronics Co Ltd	EL1018, EL1019	Ext. Dcr. = 8.1mm 110°C	IEC/EN 60747- 5-5, UL 1577	VDE UL
(Alternative)	CRM ICBG (Wuxi) Co., Ltd.	1018, 1019, HK1018, HK1019	Ext. Dcr. = 8.0mm 110°C	IEC/EN 60747- 5-5, UL 1577	VDE UL
(Alternative)	CT Micro International Corporation	CT1018, CT1019	Ext. Dcr. = 8.0mm 110°C	IEC/EN 60747- 5-5, UL 1577	VDE UL
Opto-coupler (OP2) (optional)	Everlight Electronics Co Ltd	EL1018, EL1019	Ext. Dcr. = 8.1mm 110°C	IEC/EN 60747- 5-5, UL 1577	VDE UL
(Alternative)	CRM ICBG (Wuxi) Co., Ltd.	1018, 1019, HK1018, HK1019	Ext. Dcr. = 8.0mm 110°C	IEC/EN 60747- 5-5, UL 1577	VDE UL
(Alternative)	CT Micro International Corporation	CT1018, CT1019	Ext. Dcr. = 8.0mm 110°C	IEC/EN 60747- 5-5, UL 1577	VDE UL
Insulation cover on transformer	E I DUPONT DE NEMOURS & CO INC	FR530(I)(+)(f1), FR530L(I)(+)(f1)	V-0, 155 °C. min. thickness 0.4mm	UL 94	UL

TÜV Rheinland Group



2023-09-11

Date

Printed Name

Signature

2023-09-11 Henry Luo

Date

Printed Name

 Stamp & Signature of licenseholder  
 (name of authorized person)


Certificate No. S 50497020 0003 Report No. 02-Chengje-50098920 004 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 9 of 12

Transformer (T2)	Shenzhen Fujia Appliance Co., Ltd.	2017-T1 (for output voltage 5.0-9.0V) 2017-T2 (for output voltage 9.5-19.5V) 2017-T3 (for output voltage 20.0-33.0V) 2017-T4 (for output voltage 36.0-54.0V)	Class B	Applicable part of IEC/EN 62368-1 and according to IEC 60085	Tested with appliance
- Bobbin	Sumitomo Bakelite Co. Ltd	PM-9820, PM-9630, PM-9823	Phenolic, V-0, 150°C, Min. thickness 0.9 mm	UL 94	UL
(Alternative)	Chang Chun Plastics	T-378J, T378J, T375J(G5)(G6), T375HF	PMC, V-0, 150°C, Min. thickness 0.6mm	UL 94	UL
- Secondary Triple insulated wire	Furukawa Electric Co., Ltd.	TEX-E	130°C	IEC/EN 62368-1 UL 2353	VDE UL
(Alternative)	HUIZHOU HUAYING ELECTRONIC TECHNOLOGY CO LTD	MIW-B	130°C	IEC/EN 62368-1 UL 2353	VDE, UL
(Alternative)	SHENZHEN KAIZHONG HEDONG NEW MATERIALS CO LTD	TIW-B	130°C	IEC/EN 62368-1 UL 2353	VDE, UL
(Alternative)	Shanghai Lucky Trade Co Ltd	TIW-B	Min.130°C	IEC/EN 62368-1 UL 2353	VDE, UL
(Alternative)	SHENZHEN JIUDING NEW MATERIAL CO., LTD.	DTFW-B, DTFW-F	Min. 130°C	IEC/EN 62368-1 UL 2353	VDE, UL
-Tube	Great Holding Industrial Co Ltd	TFL, TFS, TFT	200°C	UL 224	UL

TÜV Rheinland Group



2023-09-11

Date

Printed Name

Signature

2023-09-11 Henry Luo

Date

Printed Name

 Stamp & Signature of licenseholder  
(name of authorized person)


Certificate No. S 50497020 0003 Report No. 02-Chengje-50098920 004 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 10 of 12

(Alternative)	Zeus Industrial Products Inc	TFE-LW-150, TFE-TW-300, TFE-SW-600	200°C	UL 224	UL
(Alternative)	SHENGZHENG HANGXUAN S&T CO LTD	XH-TFS	200°C	UL 224	UL
(Alternative)	CHANGYUAN ELECTRONICS GROUP CO LTD	CB-TT-L, CB-TT-S, CB-TT-T, CB-HFT, CB-HFT(XY), CYG-MT	Min. 125°C	UL 224	UL
- Insulation tape	3M Corp	1350F-1(b), 1350- 1(c)	130°C	UL 510	UL
(Alternative)	Jingjiang Yahua Pressure Sensitive Glue Co Ltd	CT*(c)(g), PZ*(b)	130°C	UL 510	UL
(Alternative)	P Leo & Co (B C) Ltd	1P801, 1P802	130°C	UL 510	UL
(Alternative)	CHANG SHU LIANG YI TAPE INDUSTRY CO LTD	LY-XX Series	130°C	UL 510	UL
(Alternative)	SHEN ZHEN XINHUAHUI ELECTRONIC MATERIALS CO LTD	HMT, HWT	130°C	UL 510	UL
(Alternative)	DONGGUAN SHIN YAHUA ELECTRONIC MATERIAL CO LTD	CT* (b)(g), CT* (c)(g), PZ* (b), WF* (c)(h)	130°C	UL 510	UL
-Varnish	Resonac Corporation	WP-2952F-2G	130°C	UL 1446	UL
(Alternative)	ELANTAS PDG, Inc.	468-2(d)	130°C	UL 1446	UL

TÜV Rheinland Group



2023-09-11

Date

Printed Name

Signature

2023-09-11 Henry Luo

Date

Printed Name

 Stamp & Signature of licenseholder  
 (name of authorized person)


Certificate No. S 50497020 0003 Report No. 02-Chengje-50098920 004 Appendix No. 1

**Constructional Data Form (CDF) for Electrical Appliances**

Page 11 of 12

(Alternative)	LIANGSHENG SHENZHEN NEW MATERIAL TECHNOLOGY.CO ., LTD	MZ-850K	155°C	UL 1446	UL E514406
(Alternative)	HANG CHEUNG COATINGS (HUIYANG) LTD	8562*	155°C	UL 1446	UL E200154

Note:

- 1) Bridge capacitor CY2 can not be used alone.
- 2) Opto-coupler OP2 is optional only for output voltage  $\leq 33\text{Vdc}$  models, The other models it is provided.

**Functional Components**

Components which are required for performance purposes and not directly addressed by a component standard or product standard: Ripple capacitors, Mosfets, PCB, etc.

Object/part No.	Type/ model (optional)	Technical data
Protective bonding wire	Interchangeable	VW-1, Min.18AWG, <b>Min.</b> 105°C
Output cord	Interchangeable	VW-1, 300V, Min. 24AWG, min. 80 °C
PCB	Interchangeable	V-0, 130°C
Thermistor (RT1) (optional)	Interchangeable	Min.3.0 A, Min.1.0Ω, at 25°C
Heat shrinkable tube used on F1, LF2	Interchangeable	VW-1, 600V, 125°C
Line filter (LF1) (Optional)	Interchangeable	Min.0.7mH, 130°C
Magnet wire of LF1, LF2, T2	Interchangeable	130°C
Line filter (LF2) (Optional)	Interchangeable	Min.12mH,130°C
Bridge diode (BD1)	Interchangeable	Min. 2.0A, min. 600V
Electrolytic capacitor (C6)	Interchangeable	68-200μF, min. 400Vdc, min. 105°C
Transistor (Q3)	Interchangeable	Min. 7A, min. 600V
Current sense resistor (R1)	Interchangeable	Min. 0.47 ohm, Min. 1/2 W

TÜV Rheinland Group



2023-09-11

Date

Printed Name

Signature

2023-09-11 Henry Luo

Date

Printed Name

 Stamp & Signature of licenseholder  
(name of authorized person)


Certificate No. S 50497020 0003 Report No. 02-Chengje-50098920 004 Appendix No. 1**Constructional Data Form (CDF) for Electrical Appliances**

Page 12 of 12

**Functional Components**

Components which are required for performance purposes and not directly addressed by a component standard or product standard: Ripple capacitors, Mosfets, PCB, etc.

Object/part No.	Type/ model (optional)	Technical data
Current sense resistor (R5) (output power<36W not provided, ≥36W optional)	Interchangeable	Min. 0.47 ohm, Min. 1/4 W
Current sense resistor (R29) (output power<36W not provided, ≥36W optional)	Interchangeable	Min. 0.47 ohm, Min. 1/4 W
Bleeder resistor (R2, R3, R37, R38)	Interchangeable	Each max.1.8M ohm, min.1/4 W
- PCB of LF1, LF2 (optional)	Interchangeable	V-1 or better, 130°C

TÜV Rheinland Group



2023-09-11

Date

Printed Name

Signature

2023-09-11 Henry Luo

Date

Printed Name

Stamp & Signature of licenseholder  
(name of authorized person)

Product:                    SWITCHING ADAPTER

Type Designation:    FJ-SW2017xxxxxxx



Figure 1. Overall view of unit



Figure 2. Overall view of unit (AC inlet: C14)

Product:                SWITCHING ADAPTER

Type Designation:   FJ-SW2017xxxyyy

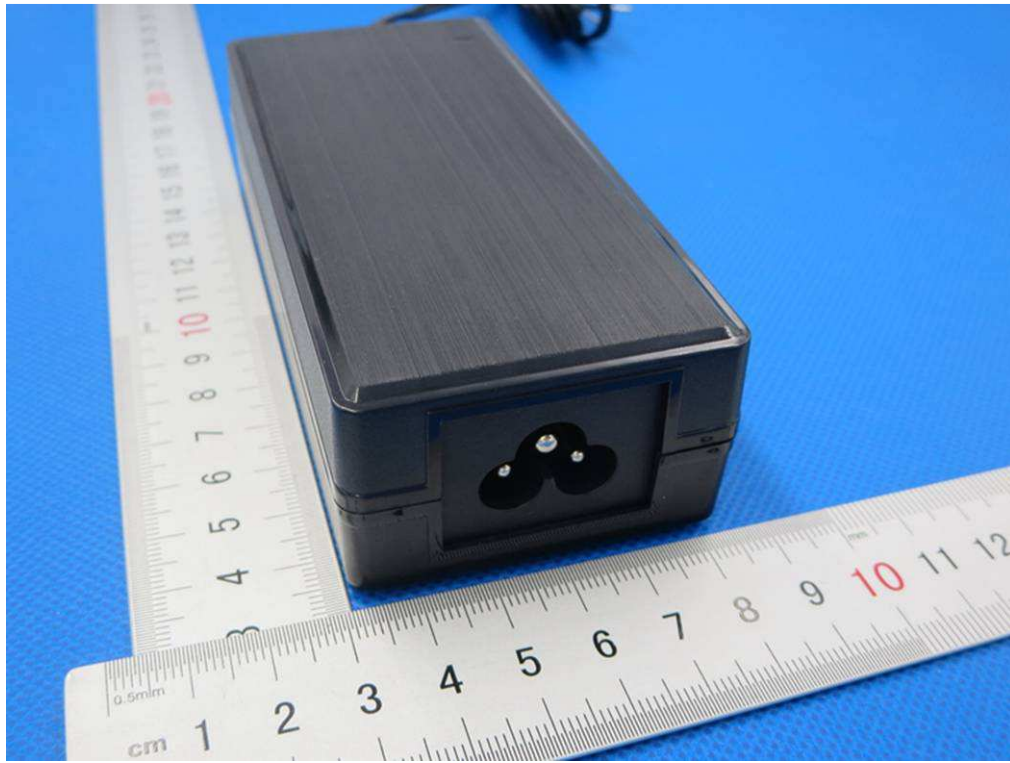


Figure 3. Overall view of unit (AC inlet: C6)

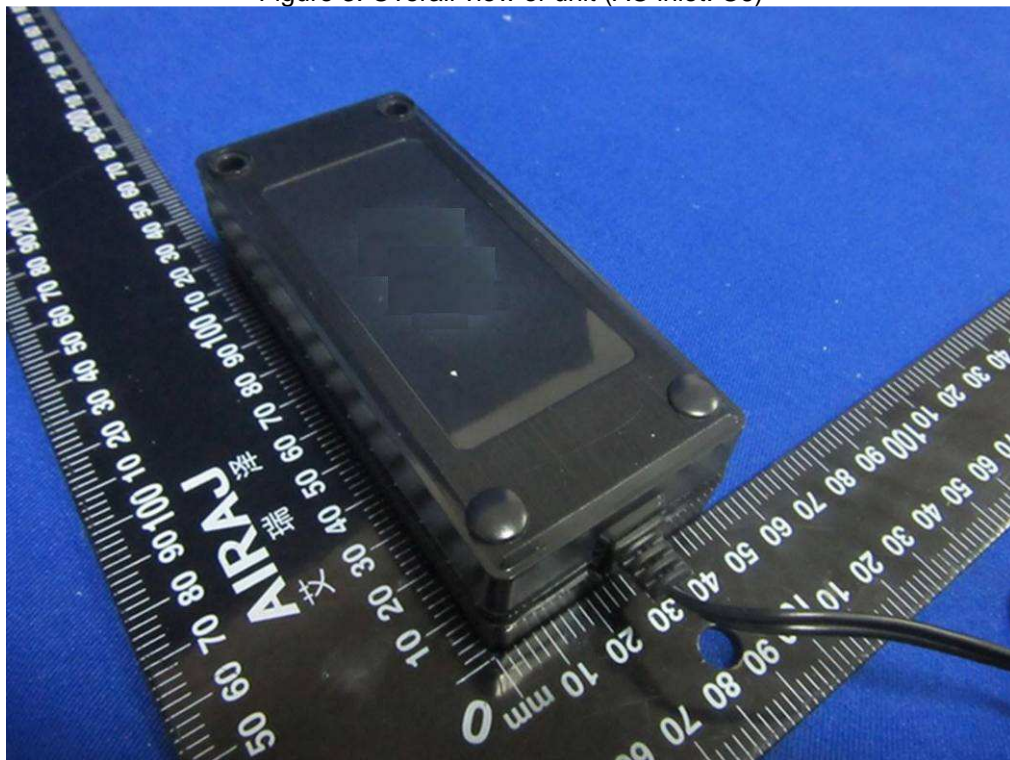


Figure 4. Overall view of unit

Product:                SWITCHING ADAPTER

Type Designation:   FJ-SW2017xxxxxxx

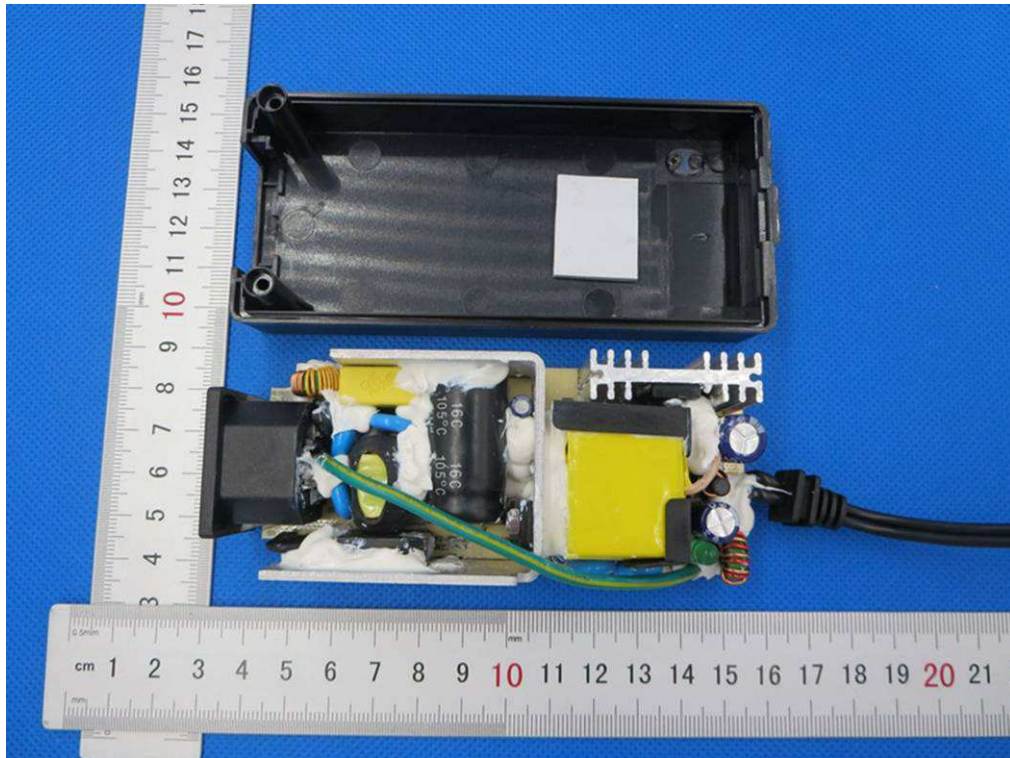


Figure 5. Internal view of unit

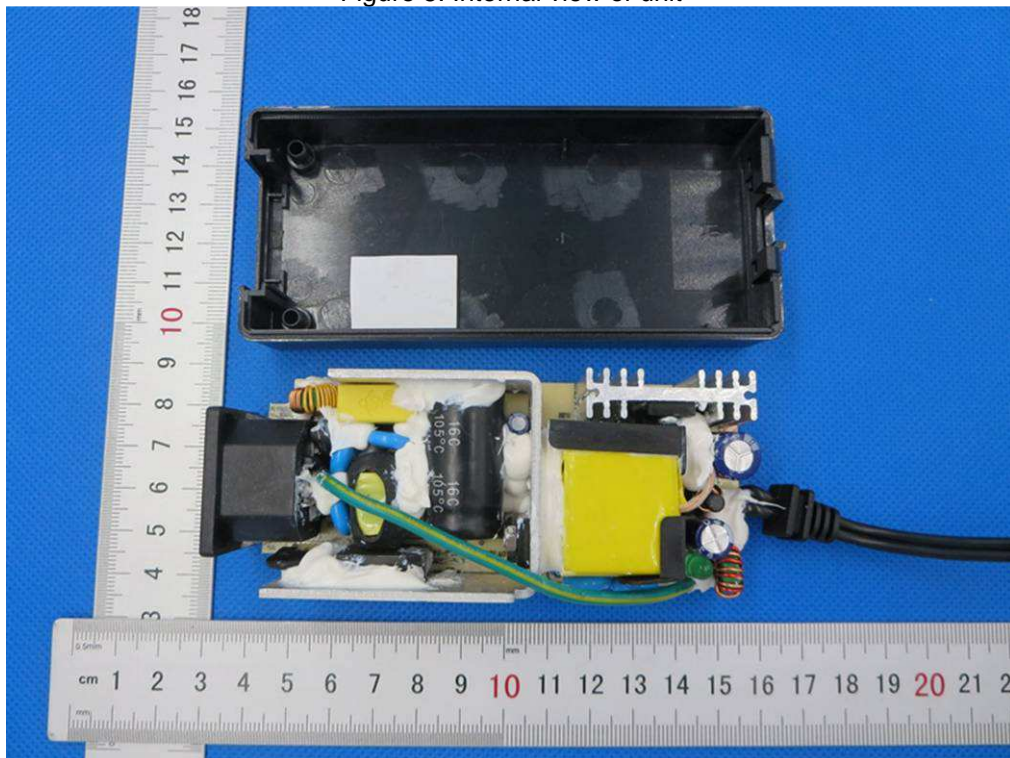


Figure 6. Internal view of unit

Product: SWITCHING ADAPTER

Type Designation: FJ-SW2017xxxxxxx

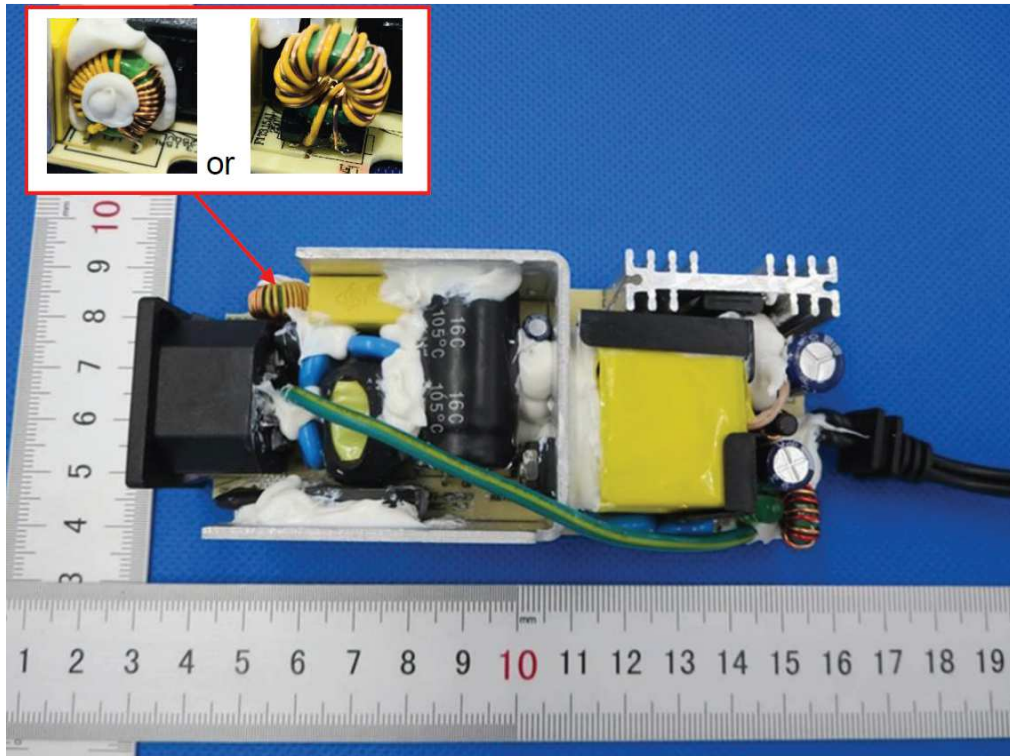


Figure 7. Internal view of unit

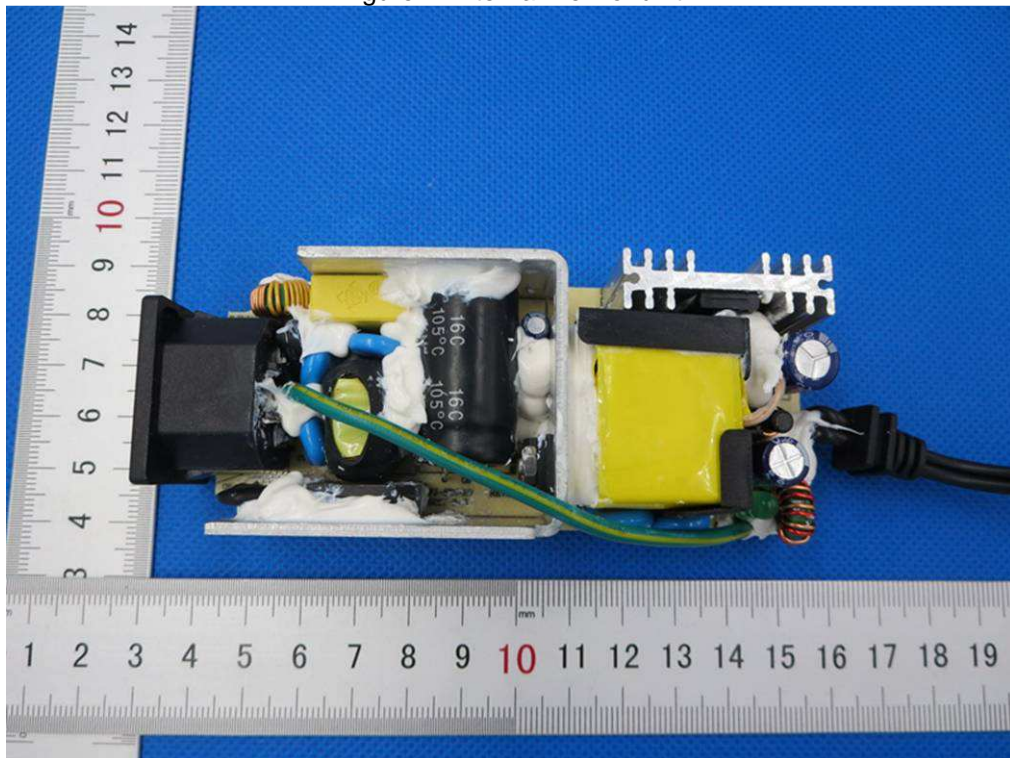


Figure 8. Component side view of PCB

Product: SWITCHING ADAPTER

Type Designation: FJ-SW2017xxxxxxx

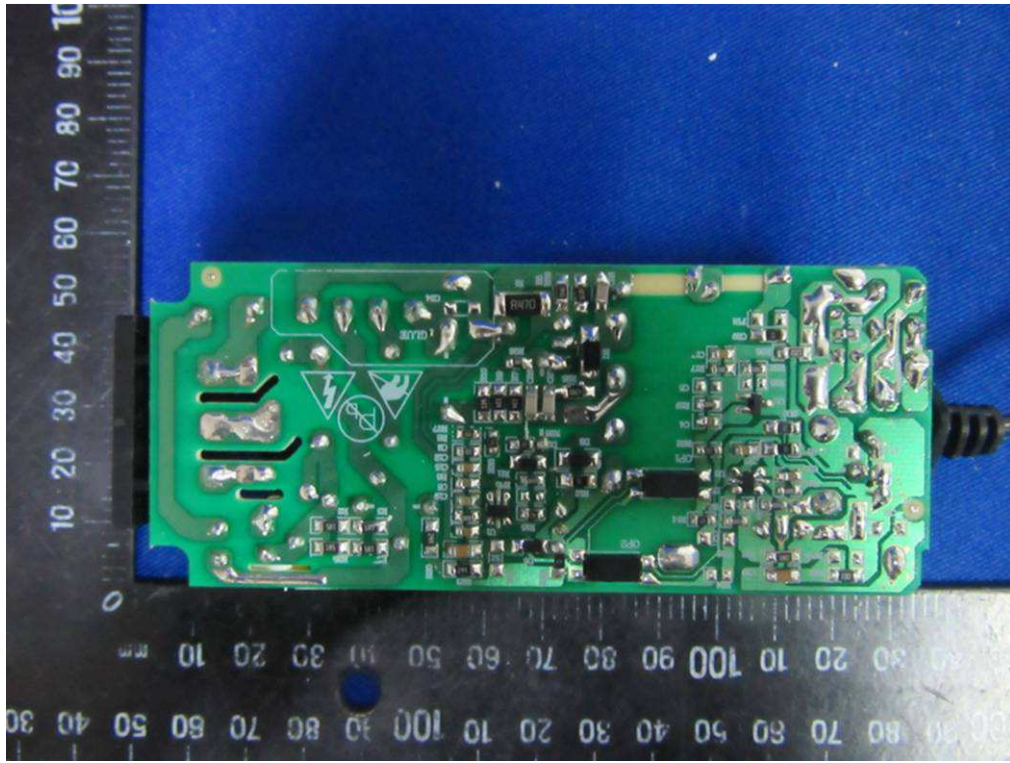


Figure 9. Trace side view of PCB

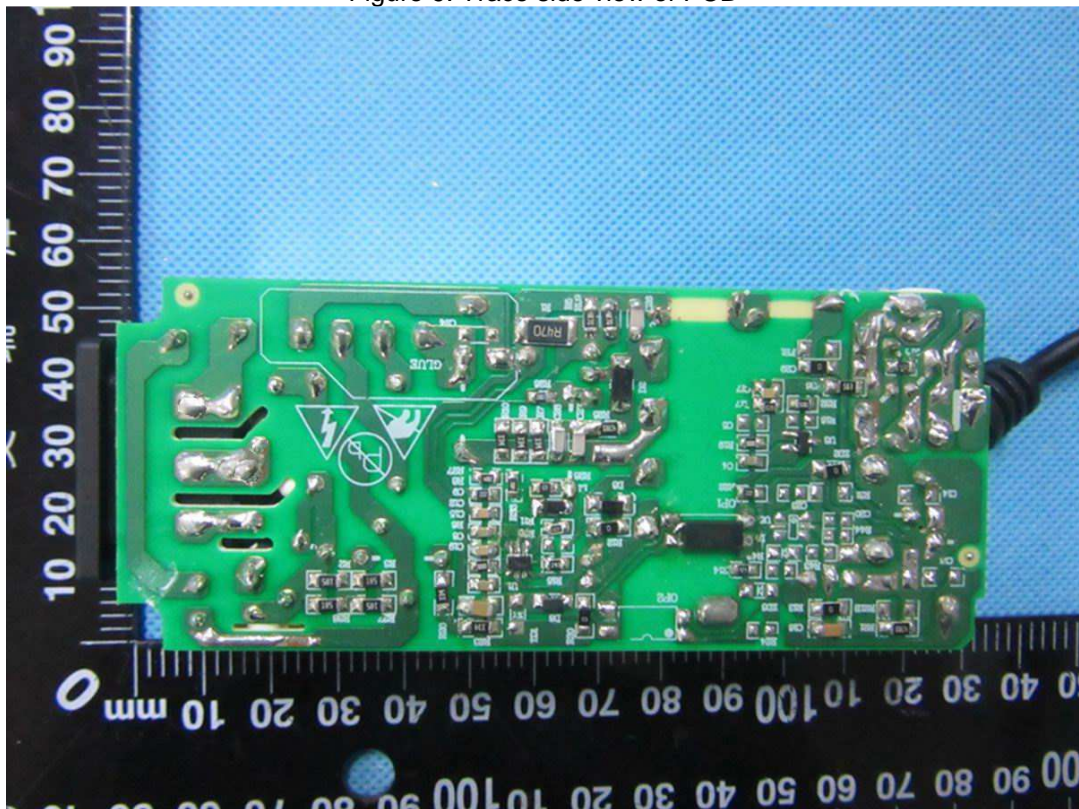


Figure 10. Trace side view of PCB (Single optocoupler)

Product:                      SWITCHING ADAPTER

Type Designation:      FJ-SW2017xxxxxxx

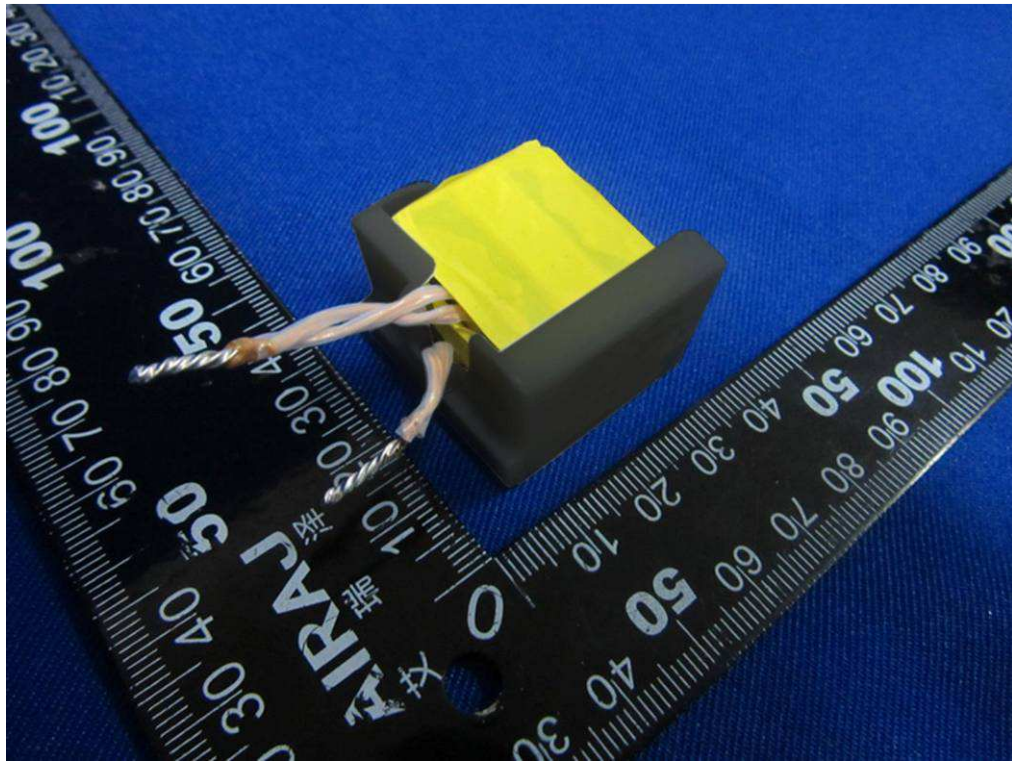


Figure 11. Overall view of transformer

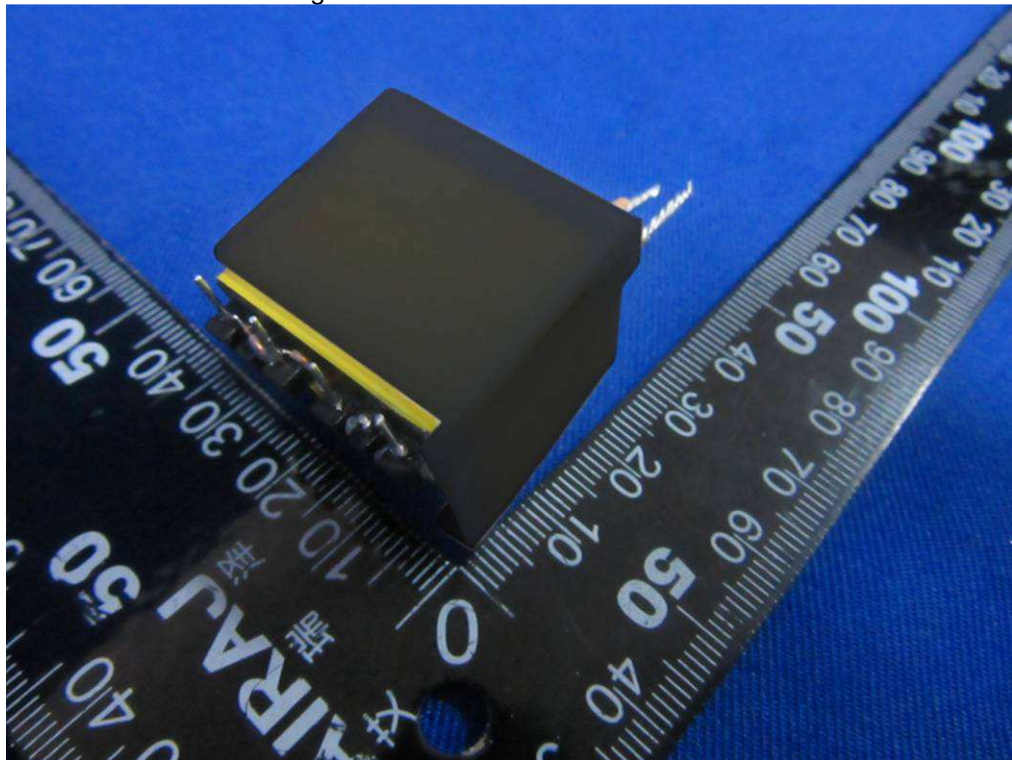


Figure 12. Overall view of transformer

Product:                      SWITCHING ADAPTER

Type Designation:    FJ-SW2017xxxxxxx

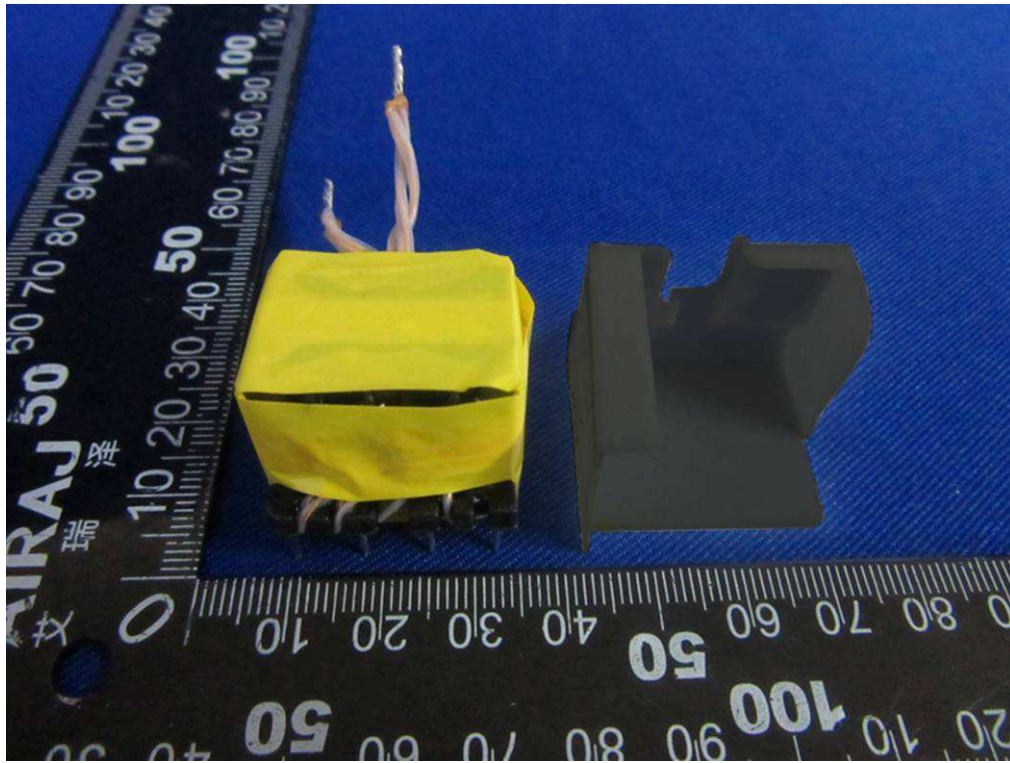


Figure 13. Detail view of transformer

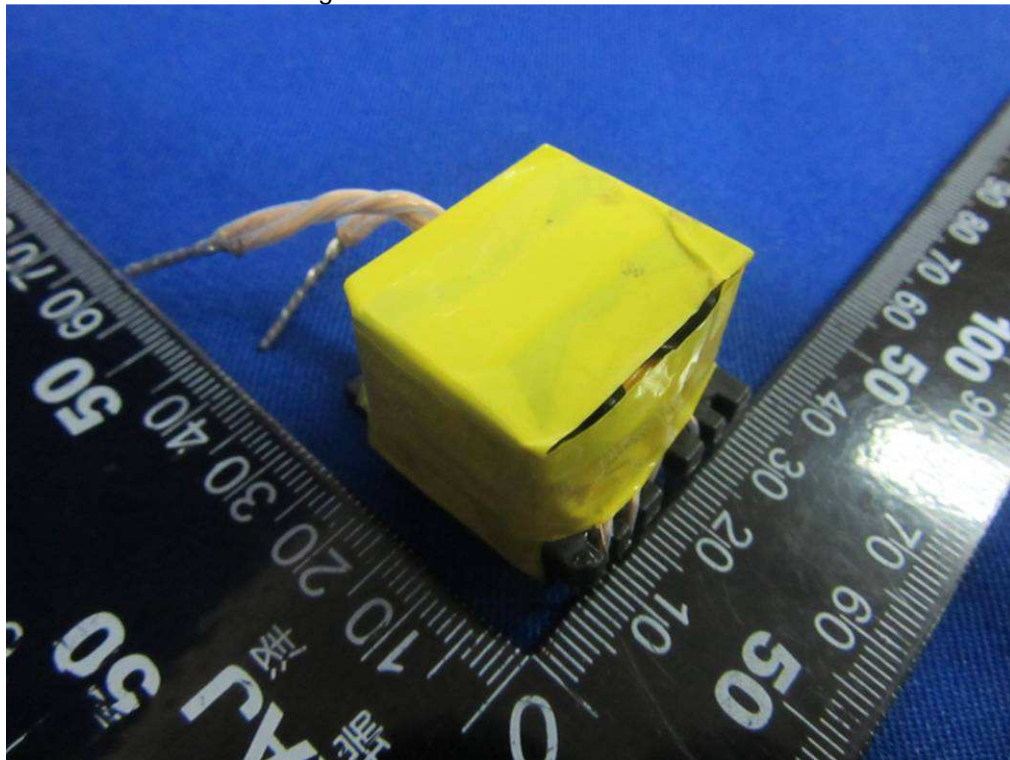


Figure 14. Detail view of transformer

Product:                SWITCHING ADAPTER

Type Designation:   FJ-SW2017xxxyyy

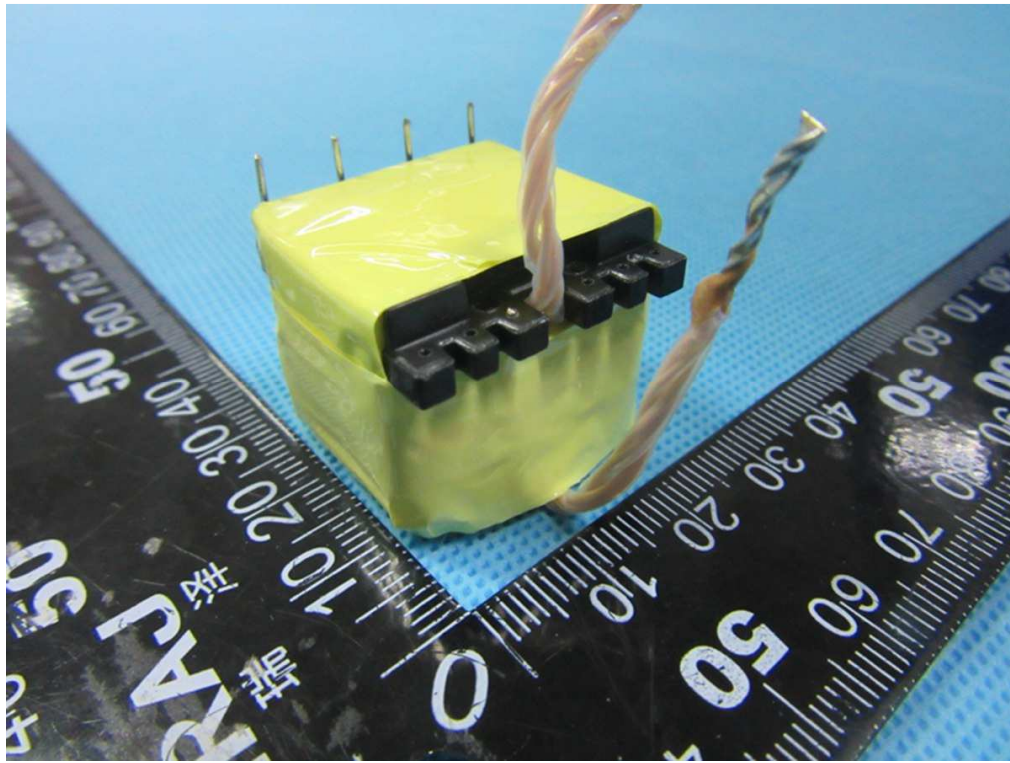


Figure 15. Detail view of transformer

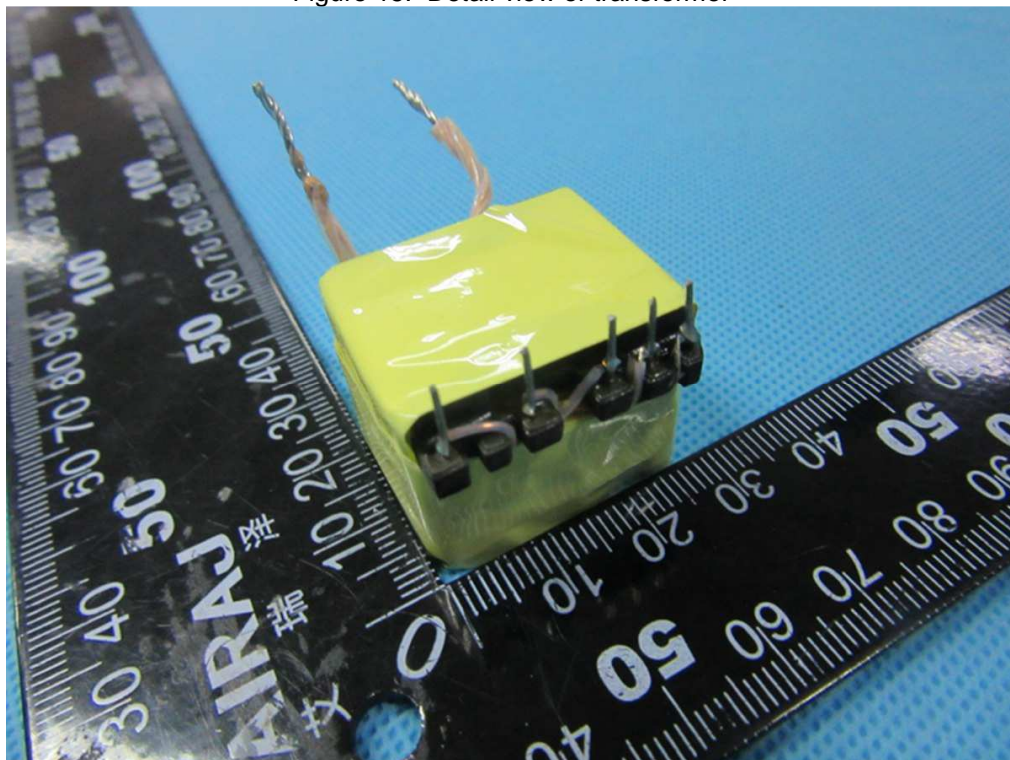


Figure 16. Detail view of transformer

Product:                      SWITCHING ADAPTER

Type Designation:    FJ-SW2017xxxxxxx

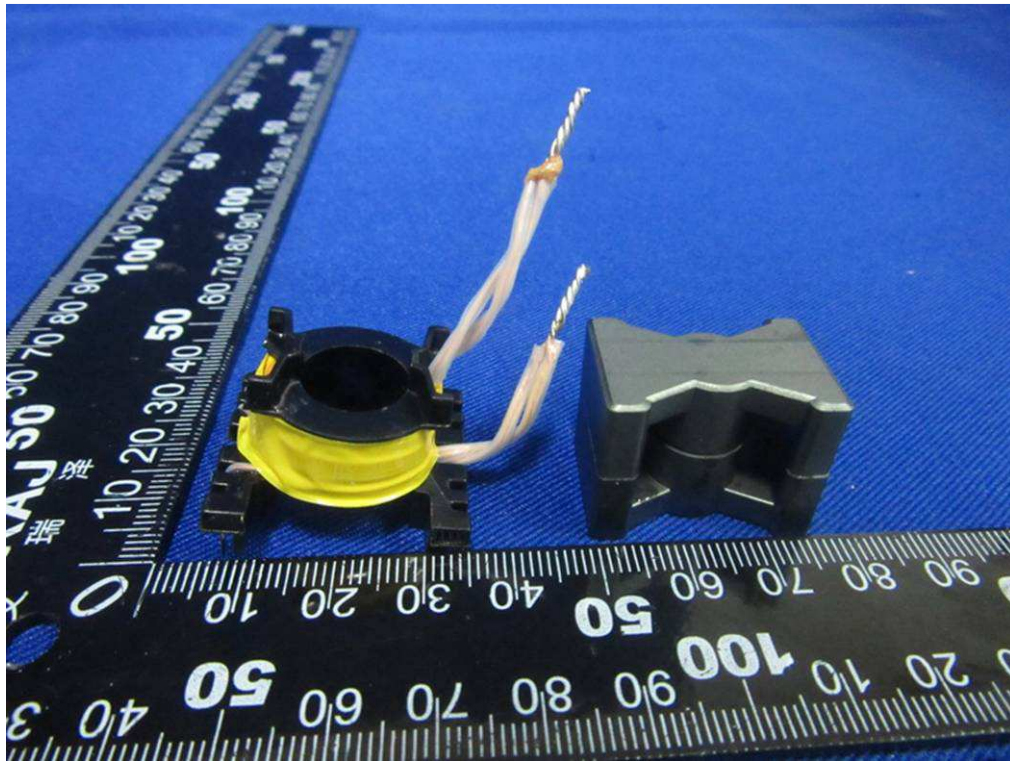


Figure 17. Detail view of transformer

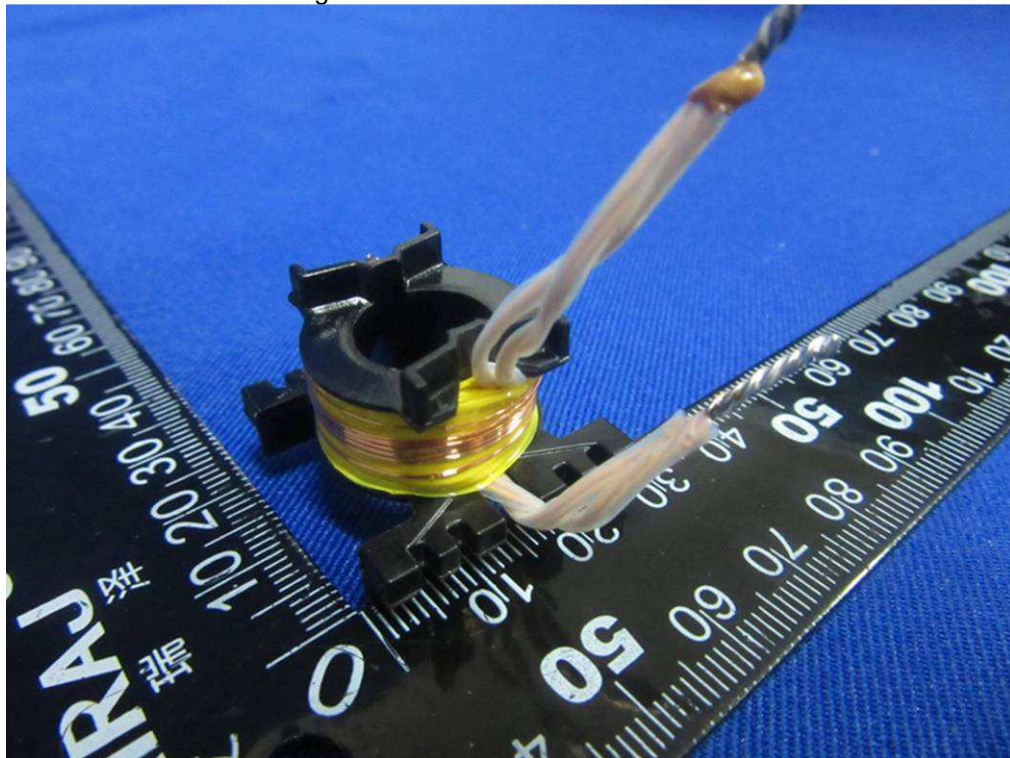


Figure 18. Detail view of transformer

Product:                SWITCHING ADAPTER

Type Designation:   FJ-SW2017xxxxxxx

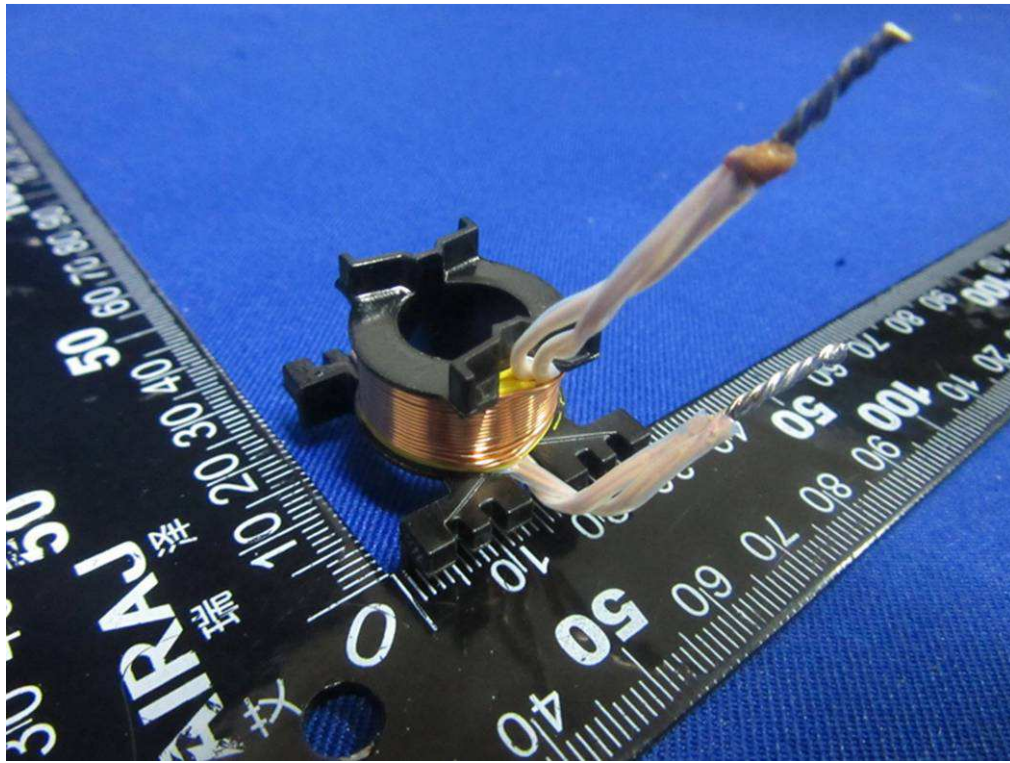


Figure 19. Detail view of transformer

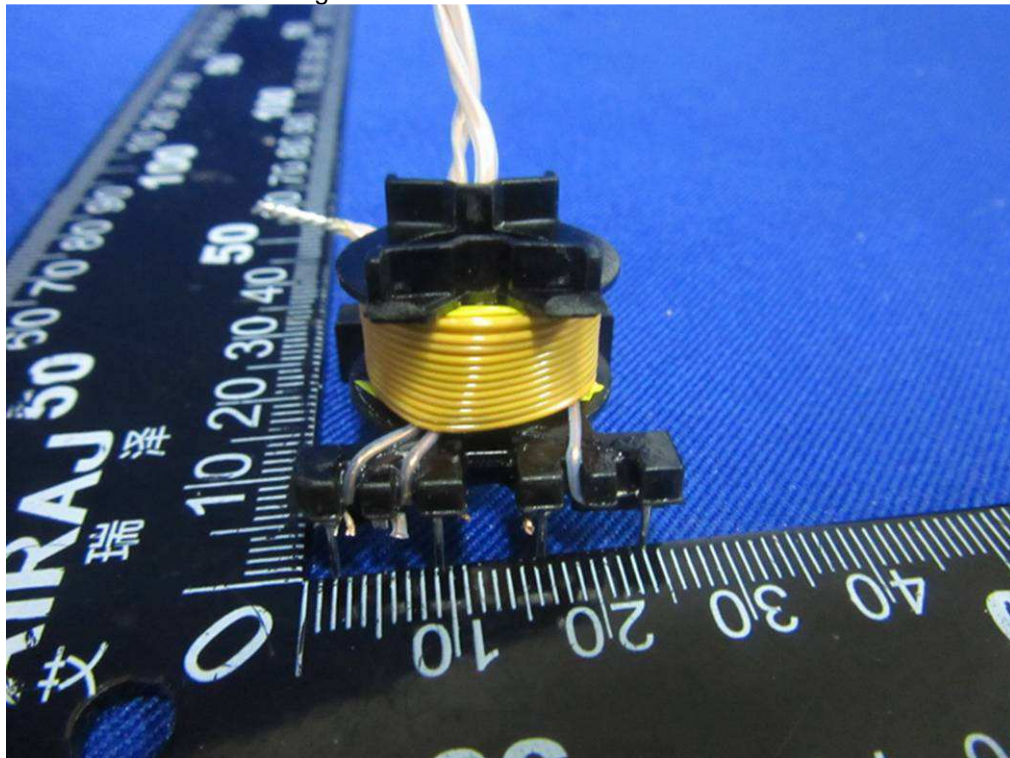


Figure 20. Detail view of transformer

Product:                      SWITCHING ADAPTER

Type Designation:      FJ-SW2017xxxxxxx



Figure 21. Detail view of transformer

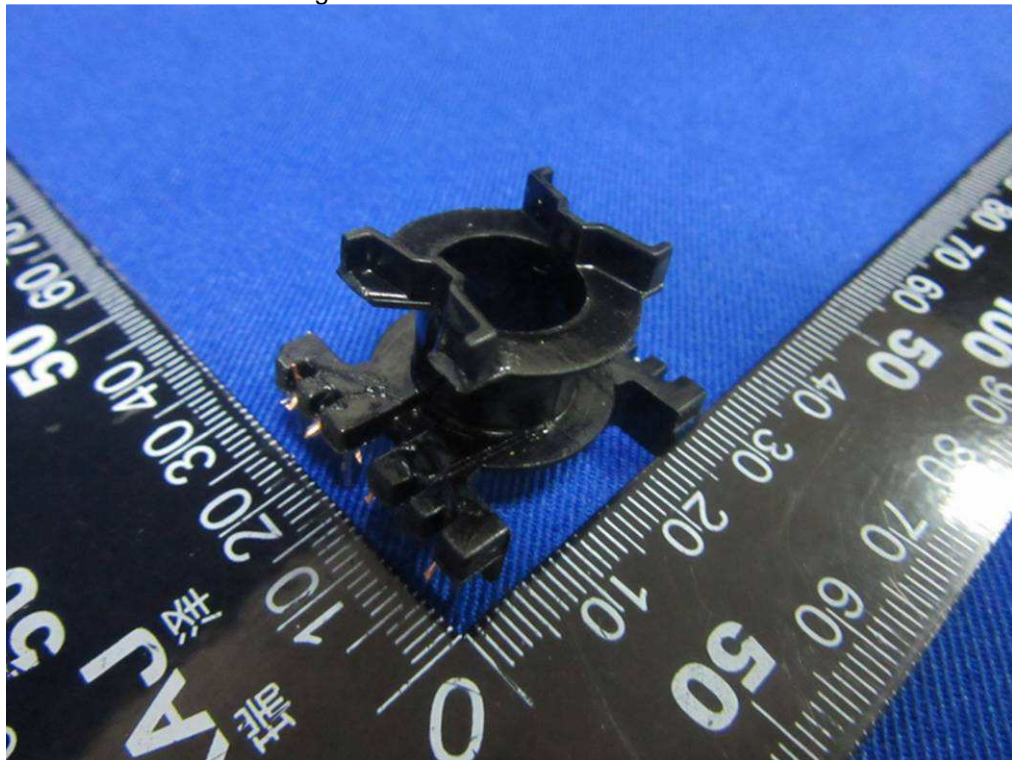


Figure 22. Detail view of transformer

Product:                      SWITCHING ADAPTER

Type Designation:      FJ-SW2017xxxxxxx

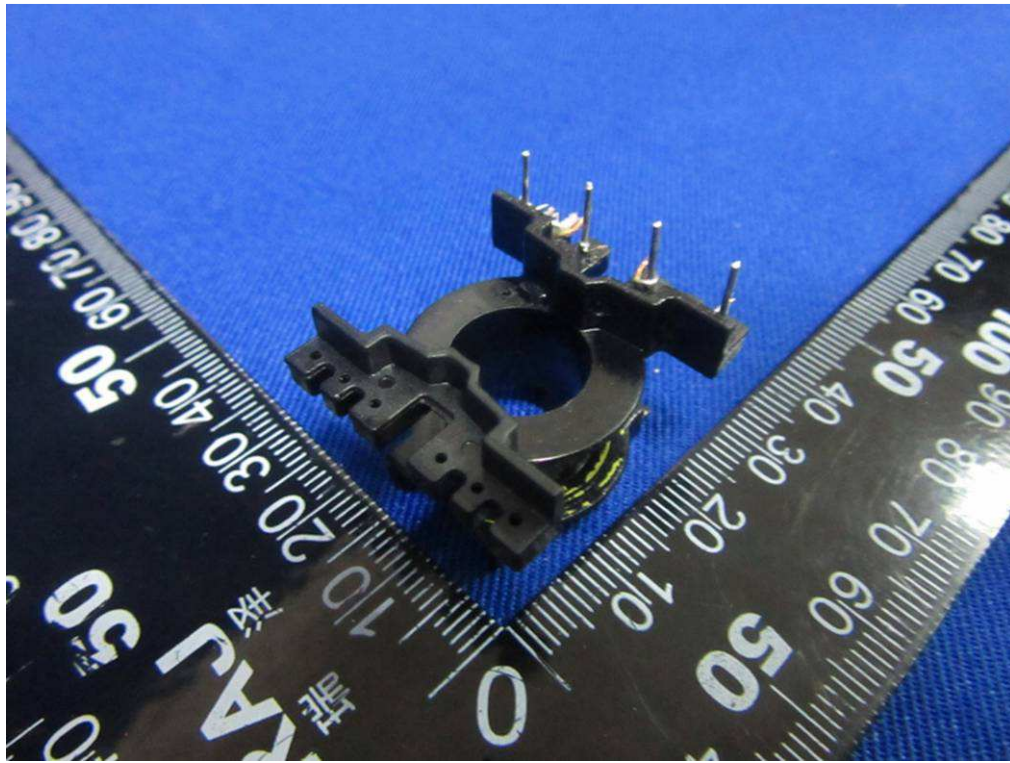


Figure 23. Detail view of transformer